




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

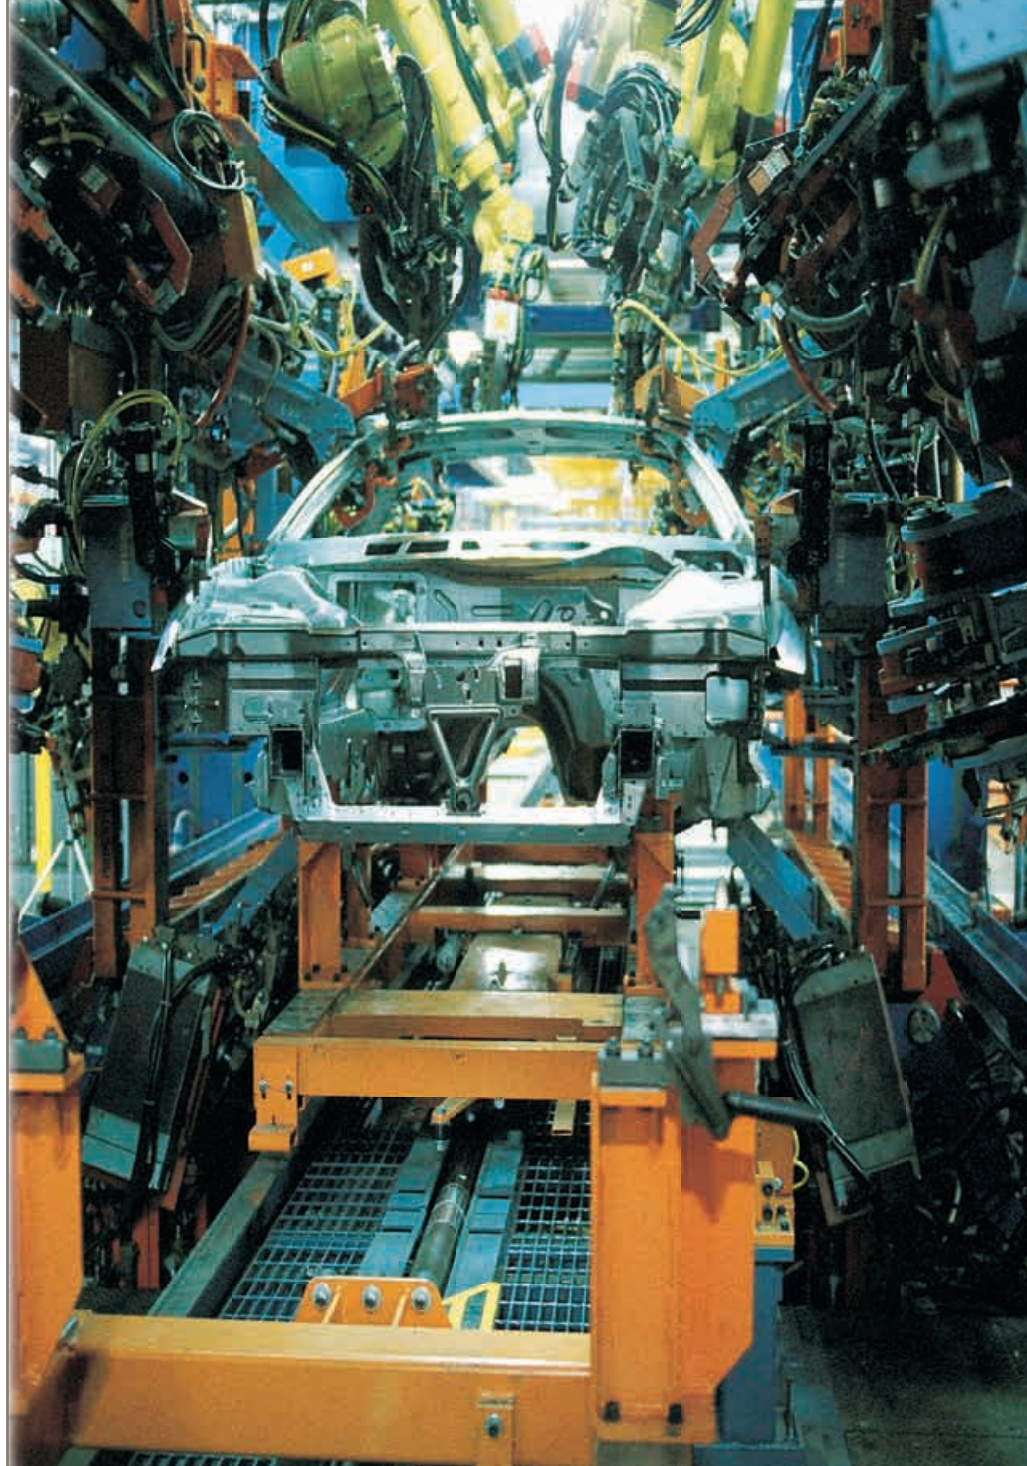

Hydraulic Hoses, Fittings and Equipment


Low-Pressure



ENGINEERING YOUR SUCCESS.

Low-Pressure Push-Lok®

The self-grip hose system for low-pressure applications

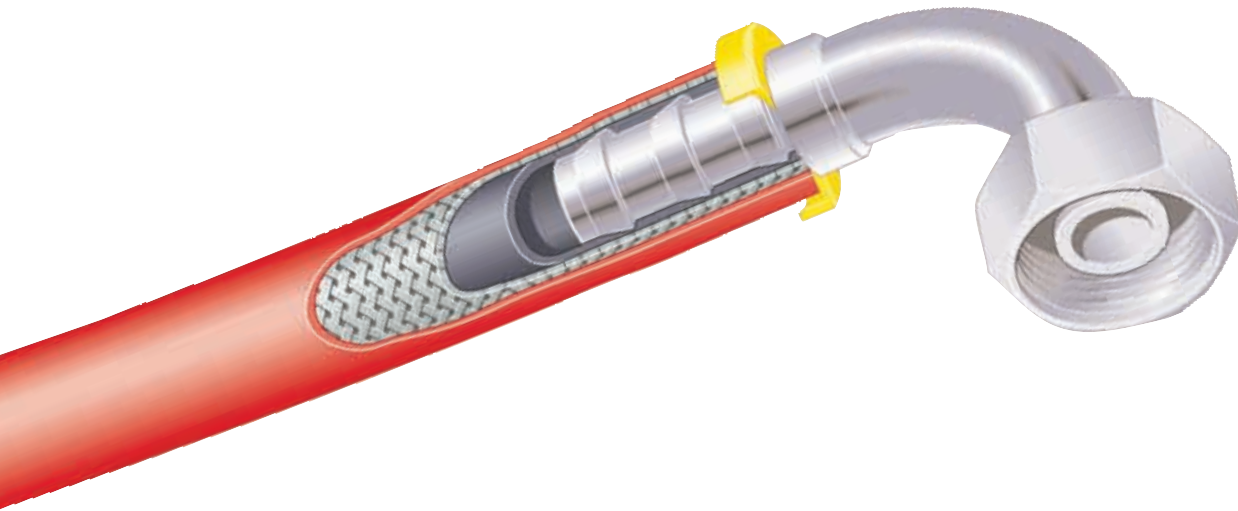

One fitting series for all hose types

with DIN, BSP, SAE, JIC and ORFS connections in brass, steel and stainless steel



Wide variety of hose types

6 rubber hose types

- 801Plus** for a variety of applications
- 804** for high-temperature water/phosphate ester fluids
- 821FR** with fire-retardant hose cover
- 831** ideal for petroleum-based fluids
- 836** for high oil temperatures
- 837BM** for a variety of applications including automotive

2 thermoplastic hose types

- 830M** for a variety of applications including automotive
- 838M** for non-conductive applications

1 hybrid hose type

- 837PU-Plus** for a variety of applications including automotive

Applications

Push-Lok® hoses offer variety, excellent performance and durability for the following applications



8 different colours

- easy identification
- simple production processes
 - one colour for one particular medium
- easy control of maintenance intervals
- simple stock planning in different departments



Easy assembly – no tools or clamps required

Push-Lok® assembly (1a, b)

- Cut the hose with a sharp knife
- Push the nipple into the hose – that's all!



Push-Lok® disassembly (2a, b)

- Cut lengthwise along a line at approximately a 20° angle from the centre line of the hose. The cut should be approximately 2 cm long. Be careful not to nick barbs when cutting the hose.
- Grip hose and give a sharp downward tug to disengage from fitting.
- Before re-using the nipple, please check it for any damage.



Push-Lok® Hoses and Fittings

Low-pressure	Push-Lok	Multipurpose	801Plus	Hose	B1a-1
			830M	Hose	B1a-2
			831	Hose	B1a-3
			837BM	Hose	B1a-4
			837PU	Hose	B1a-5
	Push-Lok	Phosphate Ester	804	Hose	B1a-6
		Fire retardant	821FR	Hose	B1a-7
		High temperature	836	Hose	B1a-8
		Non-conductive	838M	Hose	B1a-9
	Fittings	Serie 82	DIN		B1b-1 – B1b-8
			BSP		B1b-9 – B1b-11
			SAE		B1b-12 – B1b-15
			ORFS		B1b-16
			Others		B1b-17 – B1b-21
		Assembly Instructions			B1b-22
		Assembly Tools			B1b-22

801 – Push-Lok Plus

For a variety of applications

Primary Applications

All Markets: For light applications
Paper and Pulp: For water / air applications

Restrictions

Not permitted for use in air brake systems
Not suitable for high dynamic pulsation systems
Not recommended for fuels (petrol, diesel etc.)
Not recommended for mineral based hydraulic and lubricating oils

Construction

Tube: Synthetic rubber
Reinforcement: High tensile textile layer
Cover: High performance synthetic rubber in different colours

Temperature Range -40 °C up to +100 °C
Exception: Air max. +70 °C
Water max. +85 °C

- Very flexible
- Wide range of colours
- Available up to size -16







Recommended Fluids

Air, dry air, water, water-oil-emulsions and water-glycol-emulsions.
Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

82



Part Number						Pressure Rating						
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure				
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi			Vaccum kilo Pascal *1 kPa
801-4-XXX-RL	6	1/4	-4	6.3	12.7	2.4	350	9.7	1400	95	65	0.13
801-6-XXX-RL	10	3/8	-6	9.5	15.9	2.4	350	9.7	1400	95	75	0.16
801-8-XXX-RL	12	1/2	-8	12.7	19.8	2.1	300	8.4	1200	95	125	0.27
801-10-XXX-RL	16	5/8	-10	15.9	23.0	2.1	300	8.4	1200	51	150	0.28
801-12-XXX-RL	20	3/4	-12	19.1	26.2	2.1	300	8.4	1200	51	180	0.36
801-16-XXX-RL	25	1	-16	25.4	32.5	1.4	200	5.6	800	51	250	0.55

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 801-4-XXX-RL

XXX = BLK = black
BLU = blue
RED = red
GRN = green
GRA = grey
WHT = white
YEL = yellow



Example: 801-4-GRN-RL (green)

RL = only available on reels

801-16-XXX-RL is only available in grey or black

830M – Push-Lok

For a variety of applications
including automotive

Primary Applications

All Markets: For a variety of applications

Robot and Automotive market:

For hose bundle systems

Restrictions

Not permitted for use in air brake systems.

Not suitable for high dynamic pulsation systems.

Not recommended for fuels (petrol, diesel etc.)

Construction

Tube: Polyurethane material

Reinforcement: High tensile textile layer

Cover: High performance polyurethane material
in different colours

Temperature Range -40 °C up to +80 °C

- Chemical resistant for a wide range of fluids
- High abrasion resistance
- Free of wetting disturbing substances (LABS free)
- Small OD and bend radii
- Excellent UV and Ozone resistance








Recommended Fluids

Mineral based hydraulic and lubricating oils, coolant, antifreeze, air, water and water-oil emulsions.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating									
	Hose I.D.					 max. dynamic working pressure		 min. burst pressure					Vacuum kilo Pascal *1	min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi				kPa	mm	kg
830M-4-XXX-RL	6	1/4	-4	6.3	10.7	1.6	232	6.4	928	10	30	0.08			
830M-6-XXX-RL	10	3/8	-6	9.5	14.9	1.6	232	6.4	928	10	50	0.13			
830M-8-XXX-RL	12	1/2	-8	12.7	19.1	1.6	232	6.4	928	10	70	0.20			
830M-10-XXX-RL	16	5/8	-10	16.0	23.0	1.6	232	6.4	928	10	90	0.26			
830M-12-XXX-RL	20	3/4	-12	19.0	26.0	1.6	232	6.4	928	10	110	0.31			

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 830M-4-XXX-RL

XXX = BLK = black

BLU = blue

RED = red

GRN = green



Example: 830M-4-GRN-RL (green)

RL = only available on reels

831 – Push-Lok

Ideal for petroleum based fluids

Primary Applications

All Markets: For a wide range of fluids

Restrictions

Not permitted for use in air brake systems.
Not suitable for high dynamic pulsation systems.
Not recommended for fuels (petrol, diesel etc.)

Construction

Tube: Synthetic rubber
Reinforcement: High tensile textile layer
Cover: High performance synthetic rubber
in different colours

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C
Water max. +85 °C








- Max. working pressure up to 2,4 MPa
- High temperature level for petroleum based fluids
- Nitrile (NBR) inner tube – extended fluid compatibility

Recommended Fluids

Mineral based hydraulic and lubricating oils, coolant, antifreeze, air, water and water-oil emulsions.
Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating							
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure					
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi				Vacuum kilo Pascal *1 kPa
	mm												mm
831-4-XXX-RL	6	1/4	-4	6.3	12.7	2.4	350	9.7	1400	95	65	0.13	
831-6-XXX-RL	10	3/8	-6	9.5	15.9	2.0	300	8.3	1200	95	75	0.16	
831-8-XXX-RL	12	1/2	-8	12.7	19.8	2.0	300	8.3	1200	95	130	0.27	
831-10-XXX-RL	16	5/8	-10	15.9	23.0	2.0	300	8.3	1200	51	150	0.28	
831-12-XXX-RL	20	3/4	-12	19.1	26.2	2.0	300	8.3	1200	51	180	0.36	

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa
Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 831-4-XXX-RL

XXX = BLK = black
BLU = blue
RED = red
GRN = green



Example: 831-4-GRN-RL (green)
RL = only available on reels

837BM – Push-Lok

For a variety of applications
including automotive

Primary Applications

All Markets: For a variety of applications
Automotive: For water / air applications

Restrictions

Not permitted for use in air brake systems
Not suitable for high dynamic pulsation systems
Not recommended for fuels (petrol, diesel etc.)
Not recommended for mineral based hydraulic
and lubricating oils

Construction

Tube: Synthetic rubber
Reinforcement: High tensile textile layer
Cover: High performance synthetic rubber
in different colours

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C
Water max. +85 °C







- High level of hose flexibility
- High abrasion resistant
- Free of wetting disturbing substances
- Low push-in forces

Recommended Fluids

Air, dry air, water, water-oil-emulsions and
water-glycol-emulsions.
Consult the chemical compatibility section on
pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				Vaccum kilo Pascal *1	 min. bend radius	 weight
	max. dynamic working pressure		min. burst pressure									
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi		kPa	mm
837BM-4-XXX-RL	6	1/4	-4	6.3	12.7	1.6	235	6.4	940	95	65	0.13
837BM-6-XXX-RL	10	3/8	-6	9.5	15.9	1.6	235	6.4	940	95	75	0.16
837BM-8-XXX-RL	12	1/2	-8	12.7	19.8	1.6	235	6.4	940	95	130	0.27
837BM-10-XXX-RL	16	5/8	-10	15.9	23.0	1.6	235	6.4	940	51	150	0.28
837BM-12-XXX-RL	20	3/4	-12	19.1	26.2	1.6	235	6.4	940	51	180	0.36
837BM-16-XXX-RL	25	1	-16	25.4	32.5	1.4	200	5.6	800	51	250	0.55

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa

Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 837BM-4-XXX-RL

XXX = BLK = black
BLU = blue
RED = red
GRN = green
GRA = grey



Example: 837BM-4-GRN-RL (green)

RL = only available on reels

837PU-Plus – Hybrid Push-Lok

For a variety of applications
including automotive

Primary Applications

All Markets: For high demanding applications
For energy chain systems

Robot and Automotive market:
For hose bundle systems

Restrictions

Not permitted for use in air brake systems
Not suitable for high dynamic pulsation systems
Not recommended for fuels (petrol, diesel etc.)
Not recommended for mineral based hydraulic
and lubricating oils

Construction

Tube: Synthetic rubber

Reinforcement: High tensile textile layer

Cover: High performance polyurethane material
in different colours

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C

Water max. +85 °C



- High level of hose flexibility
- High abrasion resistance
- High torsion resistance
- Free of wetting disturbing substances
- Low push-in forces








Recommended Fluids

Air, dry air, water, water-oil-emulsions and
water-glycol-emulsions.

Consult the chemical compatibility section on
pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating									
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure					Vaccum kilo Pascal *1	min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi				kPa	mm	kg
837PU-4-xxx-RL	6	1/4	-4	6.3	12.7	1.6	235	6.4	940	95	30	0.11			
837PU-6-xxx-RL	10	3/8	-6	9.5	15.9	1.6	235	6.4	940	95	50	0.15			
837PU-8-xxx-RL	12	1/2	-8	12.7	19.8	1.6	235	6.4	940	95	70	0.26			
837PU-10-xxx-RL	16	5/8	-10	15.9	23.0	1.6	235	6.4	940	51	90	0.27			
837PU-12-xxx-RL	20	3/4	-12	19.1	26.2	1.6	235	6.4	940	51	110	0.33			

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa
Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 837PU-4-XXX-RL

XXX = BLK = black
BLU = blue
RED = red
GRN = green
GRA = grey



Example: 837PU-4-GRN-RL (green)
RL = only available on reels

804 – Push-Lok

For high temperature
water and phosphate ester fluid

Primary Applications

Injection Moulding: For special tempering circuits.

Restrictions

Not permitted for use in air brake systems.

Not suitable for high dynamic pulsation systems.

Do not allow tube to contact any petroleum based fluids.

Construction

Tube: EPDM material

Reinforcement: High tensile textile layer

Cover: Black EPDM material

Temperature Range up to +80 °C

Exception: Air max. +70 °C

Water max. +93 °C



- For hot water up to +93 °C
- For phosphate ester fluids







Recommended Fluids

Phosphate ester based hydraulic fluids, water, water glycol emulsions, air. Use liquid soap as lubricant. Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

82



Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				Vaccum kilo Pascal *1 kPa	 min. bend radius	 weight
	DN	Inch	Size	mm	mm	 max. dynamic working pressure		 min. burst pressure				
						MPa	psi	MPa	psi			
804-4-RL	6	1/4	-4	6.3	12.7	0.9	125	3.4	500	65	0.13	0.13
804-6-RL	10	3/8	-6	9.5	15.9	0.9	125	3.4	500	75	0.16	0.16
804-8-RL	12	1/2	-8	12.7	19.8	0.9	125	3.4	500	130	0.27	0.27
804-12-RL	20	3/4	-12	19.1	26.2	0.9	125	3.4	500	180	0.36	0.28

RL = only available on reels

821FR – Push-Lok

With fire retardant hose cover

Primary Applications

All Markets: For a variety of applications

Restrictions

Not permitted for use in air brake systems.
Not suitable for high dynamic pulsation systems.
Not recommended for fuels (petrol, diesel etc.)

Construction

Tube: Synthetic PKR-rubber
Reinforcement: High tensile textile layer
Cover: A fire retardant special fiber outer cover

Temperature Range -40 °C up to +100 °C


Exception: Air max. +100 °C
Water max. +85 °C







- Fire retardant hose cover
- Very flexible
- For high level air temperatures

Recommended Fluids

Mineral based hydraulic and lubricating oils, coolant, antifreeze, air, water and water-oil emulsions.
Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating								
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure				Vacuum kilo Pascal *1	min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi			kPa	mm	kg
821FR-4-XXX-RL	6	1/4	-4	6.3	12.7	2.4	350	9.7	1400	95	65	0.12		
821FR-6-XXX-RL	10	3/8	-6	9.5	15.9	2.0	300	8.3	1200	95	75	0.16		
821FR-8-XXX-RL	12	1/2	-8	12.7	19.8	2.0	300	8.3	1200	95	130	0.18		
821FR-12-XXX-RL	20	3/4	-12	19.0	26.2	1.7	250	6.8	1000	95	180	0.33		

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa
Note: when ordering, specify Push-Lok hose part number, followed by size, followed by colour. Example: 821FR-4-XXX-RL

XXX = BLK = black
BLU = blue
GRN = green
WHT = white
BRN = brown



Example: 821FR-4-GRN-RL (green)
RL = only available on reels

836 – Push-Lok

For high oil temperatures

Primary Applications

All Markets: Special high temperature applications

Restrictions

Not permitted for use in air brake systems.

Not suitable for high dynamic pulsation systems.

Not recommended for fuels (petrol, diesel etc.)

Construction

Tube: Synthetic PKR rubber

Reinforcement: High tensile textile layer

Cover: Blue synthetic PKR rubber

Temperature Range -48 °C up to +150 °C

Exception: Air max. +100 °C

Water max. +85 °C



- Max. oil temperature up to +150 °C
- Blue hose cover





Recommended Fluids

Mineral based hydraulic and lubricating oils, coolant, antifreeze, air, water and water-oil emulsions.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				Vaccum kilo Pascal *1 kPa	 min. bend radius	 weight
	max. dynamic working pressure		min. burst pressure		MPa	psi	MPa	psi				
	DN	Inch	Size	mm								
836-4-RL	6	1/4	-4	6.3	12.7	1.7	250	6.8	1000	95	65	0.13
836-6-RL	10	3/8	-6	9.5	15.7	1.7	250	6.8	1000	95	75	0.16
836-8-RL	12	1/2	-8	12.7	19.8	1.7	250	6.8	1000	95	130	0.27
836-10-RL	16	5/8	-10	15.9	23.1	1.7	250	6.8	1000	51	150	0.28
836-12-RL	20	3/4	-12	19.1	26.2	1.7	250	6.8	1000	51	180	0.36

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa
RL = only available on reels

838M – Push-Lok

For non-conductive applications

Primary Applications

Special Market: For special electrical requirements,
e.g. cooling lines with de-ionized water

Restrictions

Not permitted for use in air brake systems.
Not suitable for high dynamic pulsation systems.
Not recommended for fuels (petrol, diesel etc.)

Construction

Tube: Polyurethane material
Reinforcement: High tensile textile layer
Cover: Orange coloured polyurethane material


Temperature Range -40 °C up to +80 °C








- Non conductive hose
- High level of hose flexibility

Recommended Fluids

Mineral based hydraulic and lubricating oils, coolant, antifreeze, water, water-oil emulsions.
Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating						
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure				
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi			
838M-4-RL	6	1/4	-4	6.3	11.2	1.6	232	6.4	928	10	30	0.08
838M-6-RL	10	3/8	-6	9.5	15.0	1.6	232	6.4	928	10	50	0.13
838M-8-RL	12	1/2	-8	12.7	19.1	1.6	232	6.4	928	10	70	0.20
838M-10-RL	16	5/8	-10	16.0	23.0	1.6	232	6.4	928	10	90	0.26
838M-12-RL	20	3/4	-12	19.0	26.0	1.6	232	6.4	928	10	110	0.31


*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101 kPa
RL = only available on reels


Page B1b-1 – B1b-8 DIN		CA B1b-1 Female Metric 24° Light Series with O-Ring Swivel – Straight ISO 12151-2-SWS-L – DKOL	CE B1b-1 Female Metric 24° Light Series with O-Ring Swivel – 45° Elbow ISO 12151-2-SWE 45°-L – DKOL 45°	CF B1b-2 Female Metric 24° Light Series with O-Ring Swivel – 90° Elbow ISO 12151-2-SWE-L – DKOL 90°
D0 B1b-2 Male Metric 24° Light Series – Rigid Straight ISO 12151-2-S-L – CEL	C3 B1b-3 Female Metric Light Series – Swivel Straight (Ball Nose) DKL	C4 B1b-4 Female Metric Light Series – Swivel 45° Elbow (Ball Nose) DKL 45°	C5 B1b-5 Female Metric Light Series – Swivel 90° Elbow (Ball Nose) DKL 90°	
1D B1b-6 Metric Standpipe Light Series – Rigid Straight ISO 8434-1 – BEL	49 B1b-7 Metric Banjo Straight DIN 7642	9B B1b-8 Female Metric Swivel Light Series 45° Elbow	9C B1b-8 Female Metric Swivel Light Series 90° Elbow	
Page B1b-9 – B1b-11 BSP		92 B1b-9 Female BSP Parallel Pipe Swivel – Straight (60° Cone) BS5200-A – DKR	B1 B1b-9 Female BSP Parallel Pipe Swivel 45° Elbow (60° Cone) BS 5200-D – DKR 45°	B2 B1b-10 Female BSP Parallel Pipe Swivel 90° Elbow (60° Cone) BS 5200-B – DKR 90°
D9 B1b-10 Male BSP Parallel Pipe Rigid – Straight (60° Cone) BS5200 – AGR	91 B1b-11 Male BSP Taper Pipe – Rigid Straight BS5200 – AGR-K	34 B1b-11 Inch Standpipe (Brass)	Page B1b-12 – B1b-15 SAE	
01 B1b-12 Male NPTF Pipe Rigid – Straight SAE J476A / J516 – AGN	02 B1b-12 Female NPTF Pipe – Rigid Straight SAE J476A / J516	03 B1b-13 Male JIC 37° – Rigid Straight ISO12151-5-S – AGJ	06/68 B1b-13 Female – JIC 37° SAE 45° Dual Flare Swivel – Straight ISO12151-5-SWS – DKJ	
08 B1b-14 Female SAE 45° – Swivel Straight SAE J516	37/3V B1b-15 Female JIC 37° SAE 45° – Dual Flare Swivel Female 45° Elbow ISO 12151-5-SWE 45° – DKJ 45°	39/3W B1b-15 Female JIC 37° SAE 45° – Dual Flare Swivel Female 90° Elbow ISO 12151-5-SWES – DKJ 90°	Page B1b-16 ORFS	
JC B1b-16 Female ORFS Swivel – Straight Short ISO 12151-1 – SWSA SAE J516 – ORFS	Page B1b-17 – B1b-21 Others		FF B1b-17 Metru-Lok Swivel Female	AF B1b-17 Male BSP Parallel Pipe Rigid – Straight (with O-ring Seal)
NM B1b-18 Male BSP Parallel Pipe L Series – Rigid – Straight ED-Seal ISO 1179	VW121 B1b-18 BSP Swivel Female (VW-Norm 39-V-16631)	82 B1b-19 Push-Lok® Union	DP B1b-19 Metric Swivel Female Tee Male Stud	
DR B1b-20 Metric Swivel Female Tee	5C B1b-20 60° Cone Swivel Female	6C B1b-21 60° Cone Swivel Female 45° Elbow	7C B1b-21 60° Cone Swivel Female 90° Elbow	

CA

Female Metric 24° Light Series with O-Ring Swivel – Straight

ISO 12151-2-SWS-L – DKOL





XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	Tube O.D. mm	A mm	B mm	W mm
	DN	Inch	Size	mm					
3CA82-6-4	6	1/4	-4	6.3	M12x1.5	6	40	21	14
3CA82-6-4B	6	1/4	-4	6.3	M12x1.5	6	40	21	14
3CA82-8-4	6	1/4	-4	6.3	M14x1.5	8	36	17	17
3CA82-8-4B	6	1/4	-4	6.3	M14x1.5	8	36	17	17
3CA82-10-4	6	1/4	-4	6.3	M16x1.5	10	36	17	19
3CA82-10-6	10	3/8	-6	9.5	M16x1.5	10	40	17	19
3CA82-10-6B	10	3/8	-6	9.5	M16x1.5	10	39	17	19
3CA82-12-6	10	3/8	-6	9.5	M18x1.5	12	40	17	22
3CA82-12-6B	10	3/8	-6	9.5	M18x1.5	12	39	17	22
3CA82-15-8	12	1/2	-8	12.7	M22x1.5	15	44	18	27
3CA82-15-8B	12	1/2	-8	12.7	M22x1.5	15	44	17	27
3CA82-15-10B	16	5/8	-10	15.9	M22x1.5	15	60	23	27
3CA82-18-10	16	5/8	-10	15.9	M26x1.5	18	56	19	32
3CA82-22-12	20	3/4	-12	19.1	M30x2	22	58	21	36
3CA82-22-12B	20	3/4	-12	19.1	M30x2	22	58	21	36


Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.

CE

Female Metric 24° Light Series with O-Ring Swivel – 45° Elbow

ISO 12151-2-SWE 45°-L – DKOL 45°

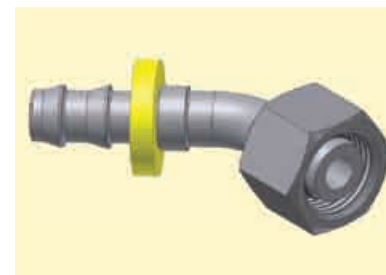

XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	Tube O.D. mm	A mm	B mm	E mm	W mm
	DN	Inch	Size	mm						
3CE82-6-4	6	1/4	-4	6.3	M12x1.5	6	56	37	21	14
3CE82-8-4	6	1/4	-4	6.3	M14x1.5	8	51	31	16	17
3CE82-10-6	10	3/8	-6	9.5	M16x1.5	10	59	37	19	19
3CE82-12-6	10	3/8	-6	9.5	M18x1.5	12	60	37	19	22
3CE82-15-8	12	1/2	-8	12.7	M22x1.5	15	69	43	21	27
3CE82-18-10	16	5/8	-10	15.9	M26x1.5	18	83	46	23	32
3CE82-22-12	20	3/4	-12	19.1	M30x2	22	97	60	26	36

Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.

Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:



B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon





82 801 804 821FR 830M 831 836 837BM 837PU 838M

CF

Female Metric 24° Light Series with O-Ring Swivel – 90° Elbow

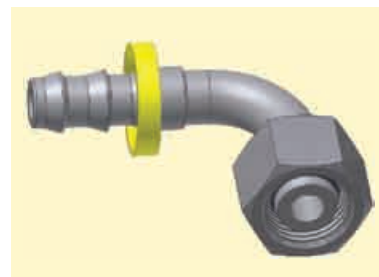ISO 12151-2-SWE-L – DKOL 90°




XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm						
3CF82-6-4	6	1/4	-4	6.3	M12x1.5	6	42	23	36	14
3CF82-8-4	6	1/4	-4	6.3	M14x1.5	8	41	23	29	17
3CF82-10-4	6	1/4	-4	6.3	M16x1.5	10	42	23	31	19
3CF82-10-6	10	3/8	-6	9.5	M16x1.5	10	49	27	35	19
3CF82-10-6B	10	3/8	-6	9.5	M16x1.5	10	49	27	35	19
3CF82-12-6	10	3/8	-6	9.5	M18x1.5	12	49	27	35	22
3CF82-12-6B	10	3/8	-6	9.5	M18x1.5	12	49	27	35	22
3CF82-15-8	12	1/2	-8	12.7	M22x1.5	15	60	34	41	27
3CF82-15-8B	12	1/2	-8	12.7	M22x1.5	15	60	34	41	27
3CF82-18-10	16	5/8	-10	15.9	M26x1.5	18	74	37	45	32
3CF82-22-12	20	3/4	-12	19.1	M30x2	22	83	46	55	36





Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
Special O-rings are available on request.

D0

Male Metric 24° Light Series – Rigid Straight

ISO 12151-2-S-L – CEL




XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	 H mm
	DN	Inch	Size	mm					
3D082-6-4	6	1/4	-4	6.3	M12x1.5	6	35	16	12
3D082-8-4	6	1/4	-4	6.3	M14x1.5	8	36	17	14
3D082-8-4B	6	1/4	-4	6.3	M14x1.5	8	36	17	14
3D082-10-6	10	3/8	-6	9.5	M16x1.5	10	41	18	17
3D082-10-6B	10	3/8	-6	9.5	M16x1.5	10	41	18	17
3D082-12-6	10	3/8	-6	9.5	M18x1.5	12	41	18	19
3D082-12-6B	10	3/8	-6	9.5	M18x1.5	12	41	18	19
3D082-15-8	12	1/2	-8	12.7	M22x1.5	15	49	23	22
3D082-15-8B	12	1/2	-8	12.7	M22x1.5	15	49	22	22
3D082-18-8	12	1/2	-8	12.7	M26x1.5	18	48	21	27
3D082-18-10	16	5/8	-10	15.9	M26x1.5	18	58	21	27
3D082-18-10B	16	5/8	-10	15.9	M26x1.5	18	58	21	27
3D082-22-12	20	3/4	-12	19.1	M30x2	22	63	27	30
3D082-22-12B	20	3/4	-12	19.1	M30x2	22	63	27	30

Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:


B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82  801 804 821FR 830M 831 836 837BM 837PU 838M

C3 Female Metric Light Series – Swivel Straight (Ball Nose)

DKL



XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	Tube O.D. mm	A mm	B mm	W mm
	DN	Inch	Size	mm					
3C382-6-4	6	1/4	-4	6.3	M12x1.5	6	33	14	14
3C382-6-4B	6	1/4	-4	6.3	M12x1.5	6	33	14	14
3C382-8-4	6	1/4	-4	6.3	M14x1.5	8	33	14	17
3C382-8-4B	6	1/4	-4	6.3	M14x1.5	8	36	17	19
3C382-10-4	6	1/4	-4	6.3	M16x1.5	10	34	15	19
3C382-10-6	10	3/8	-6	9.5	M16x1.5	10	37	15	19
3C382-10-6B	10	3/8	-6	9.5	M16x1.5	10	40	17	19
3C382-12-6	10	3/8	-6	9.5	M18x1.5	12	38	16	22
3C382-12-6B	10	3/8	-6	9.5	M18x1.5	12	40	17	22
3C382-15-8	12	1/2	-8	12.7	M22x1.5	15	42	15	27
3C382-15-8B	12	1/2	-8	12.7	M22x1.5	15	46	19	27
3C382-15-10	16	5/8	-10	15.9	M22x1.5	15	56	19	27
3C382-18-10	16	5/8	-10	15.9	M26x1.5	18	53	17	32
3C382-18-10B	16	5/8	-10	15.9	M26x1.5	18	58	22	32
3C382-22-12	20	3/4	-12	19.1	M30x2	22	53	17	36
3C382-22-12B	20	3/4	-12	19.1	M30x2	22	58	22	36
3C382-28-16	25	1	-16	25.4	M36x2	28	58	22	41
3C382-28-16B	25	1	-16	25.4	M36x2	28	58	22	41

Also available in stainless steel. Details can be found in CAT 4400.1/UK



Approved **fitting series** for hose types:





B: Brass; K: Without plastic ring; SM: Metric Hexagon

82 801 804 821FR 830M 831 836 837BM 837PU 838M

C4 Female Metric Light Series – Swivel 45° Elbow (Ball Nose)

DKL 45°

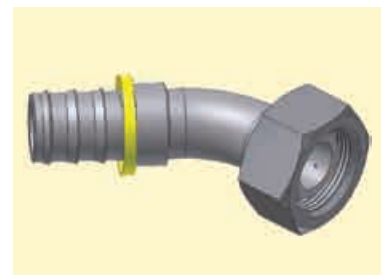


XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm						
3C482-6-4	6	1/4	-4	6.3	M12x1.5	6	51	32	16	14
3C482-6-4B	6	1/4	-4	6.3	M12x1.5	6	51	32	16	14
3C482-8-4	6	1/4	-4	6.3	M14x1.5	8	51	32	16	17
3C482-8-4B	6	1/4	-4	6.3	M14x1.5	8	51	32	16	17
3C482-10-6	10	3/8	-6	9.5	M16x1.5	10	58	35	18	19
3C482-10-6B	10	3/8	-6	9.5	M16x1.5	10	58	35	17	19
3C482-12-6	10	3/8	-6	9.5	M18x1.5	12	59	36	18	22
3C482-12-6B	10	3/8	-6	9.5	M18x1.5	12	58	36	18	22
3C482-15-8	12	1/2	-8	12.7	M22x1.5	15	68	41	19	27
3C482-15-8B	12	1/2	-8	12.7	M22x1.5	15	67	41	19	27
3C482-15-10	16	5/8	-10	15.9	M22x1.5	15	82	45	21	27
3C482-15-10B	16	5/8	-10	15.9	M22x1.5	15	82	45	21	27
3C482-18-10	16	5/8	-10	15.9	M26x1.5	18	81	45	21	32
3C482-18-10B	16	5/8	-10	15.9	M26x1.5	18	81	45	21	32
3C482-18-12	20	3/4	-12	19.1	M26x1.5	18	96	60	26	32
3C482-22-12	20	3/4	-12	19.1	M30x2	22	88	52	23	36

Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:



B: Brass; K: Without plastic ring; SM: Metric Hexagon





82  801 804 821FR 830M 831 836 837BM 837PU 838M

C5

**Female Metric
Light Series – Swivel
90° Elbow (Ball Nose)**

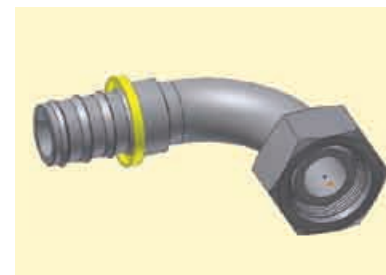DKL 90°



XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm						
3C582-6-4	6	1/4	-4	6.3	M12x1.5	6	42	23	29	14
3C582-8-4	6	1/4	-4	6.3	M14x1.5	8	42	23	29	17
3C582-8-4B	6	1/4	-4	6.3	M14x1.5	8	41	23	29	17
3C582-10-6	10	3/8	-6	9.5	M16x1.5	10	49	27	33	19
3C582-12-6	10	3/8	-6	9.5	M18x1.5	12	49	27	34	22
3C582-12-6B	10	3/8	-6	9.5	M18x1.5	12	49	27	34	22
3C582-15-8	12	1/2	-8	12.7	M22x1.5	15	60	34	39	27
3C582-15-8B	12	1/2	-8	12.7	M22x1.5	15	58	32	39	27
3C582-18-10	16	5/8	-10	15.9	M26x1.5	18	74	37	43	32
3C582-18-10B	16	5/8	-10	15.9	M26x1.5	18	74	37	43	32
3C582-22-12	20	3/4	-12	19.1	M30x2	22	88	51	50	36
3C582-22-12B	20	3/4	-12	19.1	M30x2	22	88	52	50	36
3C582-28-16B	25	1	-16	25.4	M36x2	28	101	64	66	41

Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:



B: Brass; K: Without plastic ring; SM: Metric Hexagon



82 801 804 821FR 830M 831 836 837BM 837PU 838M

1D

Metric Standpipe Light Series – Rigid Straight

ISO 8434-1 – BEL

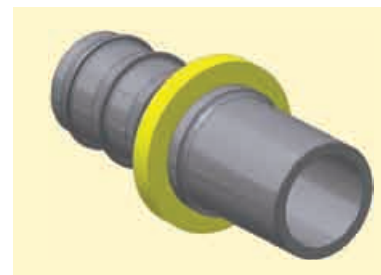


XXXXX-XX-XX Part Number 	 Hose I.D.				Tube O.D. mm	A mm	B mm	D mm
	DN	Inch	Size	mm				
31D82-6-4	6	1/4	-4	6.3	6	44	25	22
31D82-6-4B	6	1/4	-4	6.3	6	44	25	22
31D82-8-4	6	1/4	-4	6.3	8	44	25	22
31D82-8-4B	6	1/4	-4	6.3	8	44	25	22
31D82-10-6	10	3/8	-6	9.5	10	49	26	23
31D82-10-6B	10	3/8	-6	9.5	10	49	26	23
31D82-12-6	10	3/8	-6	9.5	12	49	27	23
31D82-12-6B	10	3/8	-6	9.5	12	49	27	23
31D82-15-8	12	1/2	-8	12.7	15	55	29	25
31D82-15-8B	12	1/2	-8	12.7	15	55	29	25
31D82-18-10	16	5/8	-10	15.9	18	67	30	26
31D82-18-10B	16	5/8	-10	15.9	18	67	30	26
31D82-22-12	20	3/4	-12	19.1	22	69	32	28
31D82-22-12B	20	3/4	-12	19.1	22	69	32	28

Attention: For assembly of EO-2-functional nut or nut and progressive ring use the EO-pre-assembly body.

Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:



B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon



82  801 804 821FR 830M 831 836 837BM 837PU 838M

49

Metric Banjo Straight

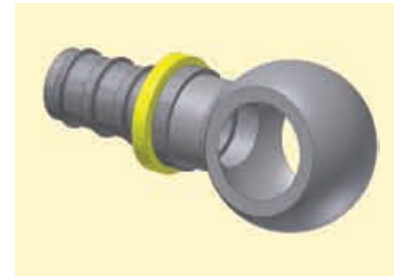DIN 7642




XXXXX-XX-XX Part Number 	 Hose I.D.				A mm	B mm	D mm
	DN	Inch	Size	mm			
34982-8-4	6	1/4	-4	6.3	36	17	8
34982-10-4	6	1/4	-4	6.3	38	19	10
34982-12-4	6	1/4	-4	6.3	40	21	12
34982-14-4	6	1/4	-4	6.3	42	23	14
34982-10-6	10	3/8	-6	9.5	42	19	10
34982-12-6	10	3/8	-6	9.5	44	21	12
34982-14-6	10	3/8	-6	9.5	47	24	14
34982-16-6	10	3/8	-6	9.5	49	26	16
34982-17-6	10	3/8	-6	9.5	49	26	17
34982-14-8	12	1/2	-8	12.7	51	25	14
34982-18-8	12	1/2	-8	12.7	55	28	18
34982-22-8	12	1/2	-8	12.7	57	31	22
34982-22-10	16	5/8	-10	15.9	68	32	22
34982-26-12	20	3/4	-12	19.1	74	38	26



Also available in stainless steel. Details can be found in CAT 4400.1/UK





Approved **fitting series** for hose types:

B: Brass; K: Without plastic ring; SM: Metric Hexagon


 801 804 821FR 830M 831 836 837BM 837PU 838M

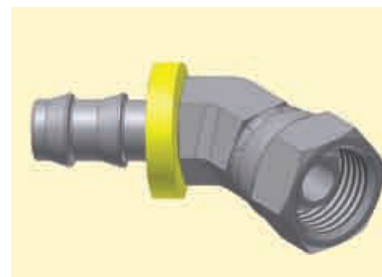



9B Female Metric Swivel Light Series 45° Elbow



XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm						
39B82-6-4BK	6	1/4	-4	6.3	M12x1.5	6	44	23	16	14
39B82-8-4BK	6	1/4	-4	6.3	M14x1.5	8	43	23	15	19
39B82-10-6BK	10	3/8	-6	9.5	M16x1.5	10	48	25	16	19
39B82-12-6BK	10	3/8	-6	9.5	M18x1.5	12	50	26	17	22
39B82-15-8BK	12	1/2	-8	12.7	M22x1.5	15	54	26	18	27

9C Female Metric Swivel Light Series 90° Elbow




XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm						
39C82-6-4BK	6	1/4	-4	6.3	M12x1.5	6	30	10	22	14
39C82-8-4BK	6	1/4	-4	6.3	M14x1.5	8	30	10	22	19
39C82-10-6BK	10	3/8	-6	9.5	M16x1.5	10	34	10	25	19
39C82-12-6BK	10	3/8	-6	9.5	M18x1.5	12	34	10	25	22
39C82-15-8BK	12	1/2	-8	12.7	M22x1.5	15	43	15	32	27

Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:


B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82  801 804 821FR 830M 831 836 837BM 837PU 838M

92 Female BSP Parallel Pipe Swivel – Straight (60° Cone)


BS5200-A – DKR




XXXXX-XX-XX Part Number 	Hose I.D.				Thread BSP	A mm	B mm	W mm
	DN	Inch	Size	mm				
39282-4-4	6	1/4	-4	6.3	1/4x19	33	14	17
39282-6-4B	6	1/4	-4	6.3	3/8x19	37	18	22
39282-6-6	10	3/8	-6	9.5	3/8x19	37	14	19
39282-8-8	12	1/2	-8	12.7	1/2x14	42	15	27
39282-8-8B	12	1/2	-8	12.7	1/2x14	46	19	27
39282-10-10	16	5/8	-10	15.9	5/8x14	53	16	30
39282-10-10B	16	5/8	-10	15.9	5/8x14	55	18	30
39282-12-12	20	3/4	-12	19.1	3/4x14	58	21	32
39282-12-12B	20	3/4	-12	19.1	3/4x14	58	21	32
39282-16-16B	25	1	-16	25.4	1x11	74	38	36

B1 Female BSP Parallel Pipe Swivel 45° Elbow (60° Cone)

BS 5200-D – DKR 45°



XXXXX-XX-XX Part Number 	Hose I.D.				Thread BSP	A mm	B mm	E mm	W mm
	DN	Inch	Size	mm					
3B182-4-4	6	1/4	-4	6.3	1/4x19	51	32	16	17
3B182-6-6	10	3/8	-6	9.5	3/8x19	58	35	18	19
3B182-6-6B	10	3/8	-6	9.5	3/8x19	58	45	17	19
3B182-8-8	12	1/2	-8	12.7	1/2x14	68	41	19	27
3B182-8-8B	12	1/2	-8	12.7	1/2x14	67	41	19	27
3B182-10-10	16	5/8	-10	15.9	5/8x14	81	45	21	30
3B182-12-12	20	3/4	-12	19.1	3/4x14	92	55	27	32

Also available in stainless steel. Details can be found in CAT 4400.1/UK



Approved **fitting series** for hose types:





B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82 801 804 821FR 830M 831 836 837BM 837PU 838M

B2 Female BSP Parallel Pipe Swivel 90° Elbow (60° Cone)

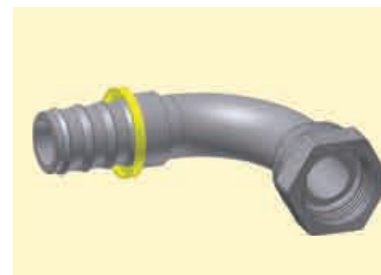
BS 5200-B – DKR 90°







XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread BSP	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm					
3B282-4-4	6	1/4	-4	6.3	1/4x19	42	23	29	17
3B282-6-6	10	3/8	-6	9.5	3/8x19	49	27	33	19
3B282-6-6B	10	3/8	-6	9.5	3/8x19	49	27	33	19
3B282-8-8	12	1/2	-8	12.7	1/2x14	60	34	39	27
3B282-8-8B	12	1/2	-8	12.7	1/2x14	60	34	39	27
3B282-10-8	12	1/2	-8	12.7	5/8x14	58	32	40	30
3B282-10-10	16	5/8	-10	15.9	5/8x14	74	37	43	30
3B282-10-10B	16	5/8	-10	15.9	5/8x14	74	37	44	30
3B282-12-12	20	3/4	-12	19.1	3/4x14	83	46	53	32
3B282-12-12B	20	3/4	-12	19.1	3/4x14	83	46	53	32

D9 Male BSP Parallel Pipe Rigid – Straight (60° Cone)

BS5200 – AGR




XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread BSP	A mm	B mm	 H mm
	DN	Inch	Size	mm				
3D982-2-4	6	1/4	-4	6.3	1/8x28	36	17	14
3D982-4-4	6	1/4	-4	6.3	1/4x19	41	23	19
3D982-4-4B	6	1/4	-4	6.3	1/4x19	41	23	19
3D982-4-6	10	3/8	-6	9.5	1/4x19	44	21	19
3D982-6-6	10	3/8	-6	9.5	3/8x19	45	23	22
3D982-6-6B	10	3/8	-6	9.5	3/8x19	45	23	22
3D982-8-8	12	1/2	-8	12.7	1/2x14	53	27	27
3D982-8-8B	12	1/2	-8	12.7	1/2x14	53	27	27
3D982-10-10	16	5/8	-10	15.9	5/8x14	65	28	30
3D982-10-10B	16	5/8	-10	15.9	5/8x14	65	28	30
3D982-12-12	20	3/4	-12	19.1	3/4x14	65	28	32
3D982-12-12B	20	3/4	-12	19.1	3/4x14	65	28	32

Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:


B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82  801 804 821FR 830M 831 836 837BM 837PU 838M



91 Male BSP Taper Pipe – Rigid Straight


BS5200 – AGR-K



XXXXX-XX-XX Part Number 	Hose I.D.				Thread BSP	A mm	B mm	H mm
	DN	Inch	Size	mm				
39182-2-4B	6	1/4	-4	6.3	1/8x28	37	18	12
39182-4-4B	6	1/4	-4	6.3	1/4x19	40	21	14
39182-4-6B	10	3/8	-6	9.5	1/4x19	44	21	14
39182-6-6B	10	3/8	-6	9.5	3/8x19	45	22	19
39182-6-8B	12	1/2	-8	12.7	3/8x19	49	22	19
39182-8-8B	12	1/2	-8	12.7	1/2x14	55	29	22
39182-8-10B	16	5/8	-10	15.9	1/2x14	65	28	22
39182-12-10B	16	5/8	-10	15.9	3/4x14	69	32	30
39182-12-12B	20	3/4	-12	19.1	3/4x14	69	32	30

34 Inch Standpipe (Brass)

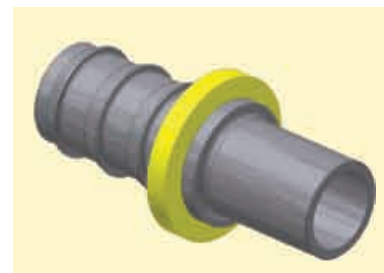

XXXXX-XX-XX Part Number 	Hose I.D.				Tube O.D.	A mm	B mm	D mm
	DN	Inch	Size	mm				
33482-4-4B	6	1/4	-4	6.3	1/4	48	29	26
33482-6-6B	10	3/8	-6	9.5	3/8	57	34	31
33482-8-8B	12	1/2	-8	12.7	1/2	55	28	25
33482-10-10B	16	5/8	-10	15.9	5/8	67	30	25
33482-12-12B	20	3/4	-12	19.1	3/4	67	30	25

Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:


B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82 801 804 821FR 830M 831 836 837BM 837PU 838M

01 Male NPTF Pipe Rigid – Straight


SAE J476A / J516 – AGN




XXXXX-XX-XX Part Number 	Hose I.D.				Thread NPTF	A mm	B mm	H mm Inch
	DN	Inch	Size	mm				
30182-2-4-SM	6	1/4	-4	6.3	1/8x27	35	16	12
30182-2-4B	6	1/4	-4	6.3	1/8x27	35	16	7/16
30182-4-4-SM	6	1/4	-4	6.3	1/4x18	40	21	14
30182-4-4B	6	1/4	-4	6.3	1/4x18	40	21	9/16
30182-6-4	6	1/4	-4	6.3	3/8x18	42	22	11/16
30182-6-4B	6	1/4	-4	6.3	3/8x18	42	22	11/16
30182-4-6-SM	10	3/8	-6	9.5	1/4x18	45	23	14
30182-4-6B	10	3/8	-6	9.5	1/4x18	45	22	9/16
30182-6-6-SM	10	3/8	-6	9.5	3/8x18	45	23	19
30182-8-6-SM	10	3/8	-6	9.5	1/2x14	52	29	22
30182-8-6B-SM	10	3/8	-6	9.5	1/2x14	52	29	22
30182-6-8B	12	1/2	-8	12.7	3/8x18	49	22	11/16
30182-8-8B-SM	12	1/2	-8	12.7	1/2x14	55	29	22
30182-8-10-SM	16	5/8	-10	15.9	1/2x14	66	29	22
30182-8-10B	16	5/8	-10	15.9	1/2x14	66	29	7/8
30182-12-10	16	5/8	-10	15.9	3/4x14	66	29	1-1/16
30182-8-12-SM	20	3/4	-12	19.1	1/2x14	66	29	22
30182-8-12B	20	3/4	-12	19.1	1/2x14	66	29	7/8
30182-12-12	20	3/4	-12	19.1	3/4x14	66	29	1-1/16
30182-12-12B	20	3/4	-12	19.1	3/4x14	66	29	1-1/16

02 Female NPTF Pipe – Rigid Straight

SAE J476A / J516




XXXXX-XX-XX Part Number 	Hose I.D.				Thread NPTF	A mm	B mm	H Inch
	DN	Inch	Size	mm				
30282-4-4B	6	1/4	-4	6.3	1/4x18	40	21	3/4
30282-6-6B	10	3/8	-6	9.5	3/8x18	46	23	7/8
30282-8-8B	12	1/2	-8	12.7	1/2x14	55	28	1-1/16

Also available in stainless steel. Details can be found in CAT 4400.1/UK



Approved **fitting series** for hose types:


B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

 801 804 821FR 830M 831 836 837BM 837PU 838M

03 Male JIC 37° – Rigid Straight


ISO12151-5-S – AGJ

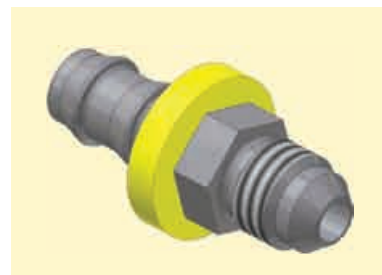


XXXXX-XX-XX Part Number 	Hose I.D.				Thread UNF	A mm	B mm	H Inch
	DN	Inch	Size	mm				
30382-4-4	6	1/4	-4	6.3	7/16x20	40	21	1/2
30382-6-6	10	3/8	-6	9.5	9/16x18	45	22	5/8
30382-6-6B	10	3/8	-6	9.5	9/16x18	45	22	5/8
30382-8-8	12	1/2	-8	12.7	3/4x16	52	26	3/4
30382-8-8B	12	1/2	-8	12.7	3/4x16	52	26	3/4
30382-12-12	20	3/4	-12	19.1	1-1/16x12	69	32	1-1/8
30382-12-12B	20	3/4	-12	19.1	1-1/16x12	69	32	1-1/8

06/68 Female – JIC 37° SAE 45° Dual Flare Swivel – Straight

ISO12151-5-SWS – DKJ




XXXXX-XX-XX Part Number 	Hose I.D.				Thread UNF	A mm	B mm	W mm Inch
	DN	Inch	Size	mm				
30682-4-4-SM	6	1/4	-4	6.3	7/16x20	40	21	14
30682-4-4B	6	1/4	-4	6.3	7/16x20	39	19	9/16
30682-5-4B	6	1/4	-4	6.3	1/2x20	40	21	5/8
30682-6-4B	6	1/4	-4	6.3	9/16x18	42	22	11/16
30682-5-6B	10	3/8	-6	9.5	1/2x20	44	21	5/8
30682-6-6	10	3/8	-6	9.5	9/16x18	46	22	11/16
30682-6-6-SM	10	3/8	-6	9.5	9/16x18	45	22	19
30682-6-6B-SM	10	3/8	-6	9.5	9/16x18	45	22	19
30682-8-6B	10	3/8	-6	9.5	3/4x16	47	24	7/8
30682-8-6-SM	10	3/8	-6	9.5	3/4x16	48	25	22
30682-10-8B	12	1/2	-8	12.7	7/8x14	52	25	1
30682-10-10-SM	16	5/8	-10	15.9	7/8x14	65	28	27
30682-10-10B	16	5/8	-10	15.9	7/8x14	62	25	1
30682-12-12-SM	20	3/4	-12	19.1	1-1/16x12	67	30	32
30682-12-12B-SM	20	3/4	-12	19.1	1-1/16x12	67	31	32

Also available in stainless steel. Details can be found in CAT 4400.1/UK



Approved **fitting series** for hose types:





B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82  801 804 821FR 830M 831 836 837BM 837PU 838M

08 Female SAE 45° – Swivel Straight

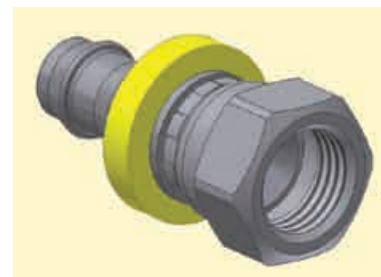SAE J516




XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread UNF	A mm	B mm	 W Inch
	DN	Inch	Size	mm				
30882-4-4	6	1/4	-4	6.3	7/16x20	39	19	9/16
30882-4-4B	6	1/4	-4	6.3	7/16x20	39	19	9/16
30882-5-4B	6	1/4	-4	6.3	1/2x20	40	21	5/8
30882-6-6B	10	3/8	-6	9.5	5/8x18	46	23	3/4
30882-8-8	12	1/2	-8	12.7	3/4x16	51	25	7/8
30882-8-8B	12	1/2	-8	12.7	3/4x16	51	25	7/8
30882-10-10	16	5/8	-10	15.9	7/8x14	65	28	1
30882-10-10B	16	5/8	-10	15.9	7/8x14	65	28	1
30882-12-12	20	3/4	-12	19.1	1-1/16x14	67	30	1-1/4
30882-12-12B	20	3/4	-12	19.1	1-1/16x14	67	30	1-1/4

Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:


B: Brass; K: Without plastic ring; SM: Metric Hexagon

 801 804 821FR 830M 831 836 837BM 837PU 838M

37/3V Female JIC 37° SAE 45° – Dual Flare Swivel Female 45° Elbow


ISO 12151-5-SWE 45° – DKJ 45°




XXXXX-XX-XX Part Number 	Hose I.D.				Thread UNF	A mm	B mm	E mm	W mm Inch
	DN	Inch	Size	mm					
33782-4-4	6	1/4	-4	6.3	7/16x20	39	20	8	9/16
33V82-4-4B-SM	6	1/4	-4	6.3	7/16x20	44	25	10	17
33782-6-6-SM	10	3/8	-6	9.5	9/16x18	51	28	11	19
33782-8-8	12	1/2	-8	12.7	3/4x16	54	35	14	7/8

39/3W Female JIC 37° SAE 45° – Dual Flare Swivel Female 90° Elbow

ISO 12151-5-SWES – DKJ 90°



XXXXX-XX-XX Part Number 	Hose I.D.				Thread UNF	A mm	B mm	E mm	W mm Inch
	DN	Inch	Size	mm					
33982-4-4	6	1/4	-4	6.3	7/16x20	39	20	17	5/8
33982-4-4	6	1/4	-4	6.3	7/16x20	39	20	17	5/8
33982-6-6	10	3/8	-6	9.5	9/16x18	50	28	22	11/16
33982-6-6-SM	10	3/8	-6	9.5	9/16x18	47	25	23	19
33982-8-8	12	1/2	-8	12.7	3/4x16	59	33	28	7/8
33982-8-8	12	1/2	-8	12.7	3/4x16	59	33	28	7/8
33W82-8-8-SM	12	1/2	-8	12.7	3/4x16	55	29	28	22
33982-10-10	16	5/8	-10	15.9	7/8x14	74	37	31	1
33982-12-12	20	3/4	-12	19.1	1-1/16x12	84	46	46	1-1/4
33982-12-12-SM	20	3/4	-12	19.1	1-1/16x12	88	52	48	32

Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:



B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon






82 801 804 821FR 830M 831 836 837BM 837PU 838M

JC

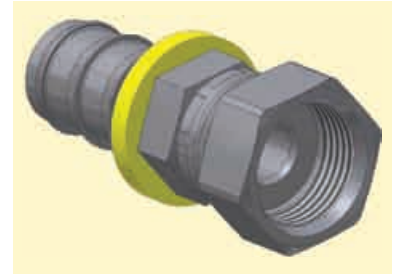**Female ORFS
Swivel – Straight
Short**

ISO 12151-1 – SWSA
SAE J516 – ORFS




XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread UNF	A mm	B mm	 H mm Inch	 W mm Inch
	DN	Inch	Size	mm					
3JC82-4-4	6	1/4	-4	6.3	9/16x18	36	17	9/16	11/16
3JC82-6-6	10	3/8	-6	9.5	11/16x16	40	18	11/16	13/16
3JC82-6-6-SM	10	3/8	-6	9.5	11/16x16	40	18	19	22
3JC82-8-6-SM	10	3/8	-6	9.5	13/16x16	43	21	22	24
3JC82-8-8-SM	12	1/2	-8	12.7	13/16x16	47	21	22	24
3JC82-8-10	16	5/8	-10	15.9	13/16x16	57	21	3/4	15/16
3JC82-10-10	16	5/8	-10	15.9	1x14	61	24	15/16	1-1/8
3JC82-10-12	20	3/4	-12	19.1	1x14	61	24	1	1-1/8
3JC82-12-12	20	3/4	-12	19.1	1-3/16x12	67	30	1-1/8	1-3/8



Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:

B: Brass; K: Without plastic ring; SM: Metric Hexagon


 801 804 821FR 830M 831 836 837BM 837PU 838M


FF Metru-Lok Swivel Female

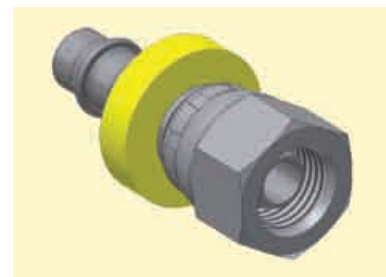

XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	Tube O.D. mm	A mm	B mm	W mm
	DN	Inch	Size	mm					
3FF82-6-4B	6	1/4	-4	6.3	M10x1	6	36	16	14
3FF82-8-4B	6	1/4	-4	6.3	M12x1	8	31	12	14
3FF82-10-6B	10	3/8	-6	9.5	M14x1	10	35	12	17
3FF82-12-6B	10	3/8	-6	9.5	M16x1	12	35	12	19
3FF82-14-8B	12	1/2	-8	12.7	M18x1	14	38	12	22
3FF82-16-8B	12	1/2	-8	12.7	M22x1.5	16	38	12	27
3FF82-18-10B	16	5/8	-10	15.9	M24x1.5	18	51	15	27
3FF82-22-12B	20	3/4	-12	19.1	M28x1.5	22	51	15	32

AF Male BSP Parallel Pipe Rigid – Straight (with O-ring Seal)



XXXXX-XX-XX Part Number 	Hose I.D.				Thread BSP	A mm	B mm	W mm
	DN	Inch	Size	mm				
3AF82-2-4B	6	1/4	-4	6.3	1/8x28	34	15	17
3AF82-4-4B	6	1/4	-4	6.3	1/4x19	39	20	19
3AF82-4-6B	10	3/8	-6	9.5	1/4x19	43	20	19
3AF82-6-6B	10	3/8	-6	9.5	3/8x19	46	23	22
3AF82-6-8B	12	1/2	-8	12.7	3/8x19	49	22	22
3AF82-8-8B	12	1/2	-8	12.7	1/2x14	53	26	27
3AF82-8-10B	16	5/8	-10	15.9	1/2x14	63	26	27

Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:


B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82 801 804 821FR 830M 831 836 837BM 837PU 838M

NM Male BSP Parallel Pipe L Series – Rigid – Straight ED-Seal


ISO 1179




XXXXX-XX-XX Part Number 	Hose I.D.				Thread BSP	A mm	B mm	H mm
	DN	Inch	Size	mm				
3NM82-6-8B	12	1/2	-8	12.7	3/8x19	52	26	22
3NM82-8-8B	12	1/2	-8	12.7	1/2x14	55	28	27
3NM82-12-12B	20	3/4	-12	19.1	3/4x14	65	28	32

VW121 BSP Swivel Female

(VW-Norm 39-V-16631)



XXXXX-XX-XX Part Number 	Hose I.D.				Thread BSP	A mm	B mm	D mm	W mm
	DN	Inch	Size	mm					
VW121-8937*	6	1/4	-4	6.3	1/4x19	32	13	5	17
VW121-8938**	10	3/8	-6	9.5	3/8x19	38	15	7.5	19
VW121-8939**	14	1/2	-8	12.7	1/2x14	46	19	11	27
VW121-8940**	16	5/8	-10	15.9	3/4x14	58	21	14	32
VW121-8941**	20	3/4	-12	19.1	1x11	53	16	17	41


*stainless steel nipple, steel nut

**brass nipple, steel nut


Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:

B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon



 801 804 821FR 830M 831 836 837BM 837PU 838M


82 Push-Lok® Union



XXXXX-XX-XX Part Number 	Hose I.D.				A mm
	DN	Inch	Size	mm	
38282-4-4B	6	1/4	-4	6.3	45
38282-4-4	6	1/4	-4	6.3	45
38282-6-6B	10	3/8	-6	9.5	54
38282-8-8	12	1/2	-8	12.7	64
38282-8-8B	12	1/2	-8	12.7	64
38282-10-10	16	5/8	-10	15.9	84
38282-10-10B	16	5/8	-10	15.9	84
38282-12-12	20	3/4	-12	19.1	84
38282-12-12B	20	3/4	-12	19.1	84

DP Metric Swivel Female Tee Male Stud

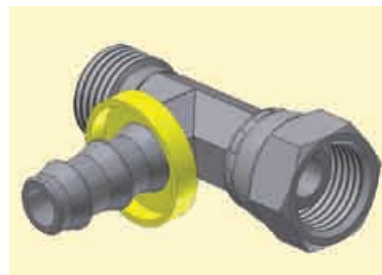

XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	A mm	B mm	E mm	H mm	W mm
	DN	Inch	Size	mm						
DP-6-6-4BK	6	1/4	-4	6.3	M12x1	43	24	30	11	14
DP-8-8-4BK	6	1/4	-4	6.3	M14x1.5	43	24	30	11	14
DP-10-10-6BK	10	3/8	-6	9.5	M16x1.5	48	26	34	13	19
DP-15-15-8BK	12	1/2	-8	12.7	M22x1.5	58	32	42	17	27

Standard nipples are stocked without plastic collar. If you need a collar, delete K from the part number.



Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:

B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon


82 801 804 821FR 830M 831 836 837BM 837PU 838M


DR Metric Swivel Female Tee

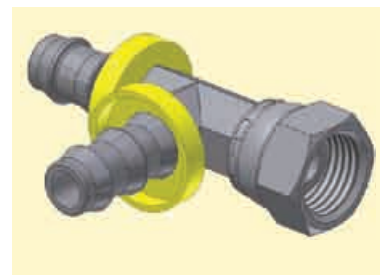

XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	A mm	B mm	E mm	F mm	H mm	W mm
	DN	Inch	Size	mm							
DR-6-4-4BK	6	1/4	-4	6.3	M12x1	54	24	30	30	11	14
DR-10-6-6BK	10	3/8	-6	9.5	M16x1.5	59	25	34	34	13	19
DR-15-8-8BK	12	1/2	-8	12.7	M22x1.5	74	32	42	42	17	27

5C 60° Cone Swivel Female




XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	A mm	B mm	W mm
	DN	Inch	Size	mm				
35C82-6-4B	6	1/4	-4	6.3	M12x1.5	33	14	14
35C82-6-4BK	6	1/4	-4	6.3	M12x1.5	33	14	14
35C82-10-6BK	10	3/8	-6	9.5	M16x1.5	38	15	19
35C82-10-6B	10	3/8	-6	9.5	M16x1.5	38	15	19
35C82-15-8B	12	1/2	-8	12.7	M22x1.5	44	18	27
35C82-15-8BK	12	1/2	-8	12.7	M22x1.5	44	18	27
35C82-18-10BK	16	5/8	-10	15.9	M26x1.5	56	18	32


Also available in stainless steel. Details can be found in CAT 4400.1/UK


Approved **fitting series** for hose types:

B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon



 801 804 821FR 830M 831 836 837BM 837PU 838M


6C 60° Cone Swivel Female 45° Elbow



XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	A mm	B mm	E mm	W mm
	DN	Inch	Size	mm					
36C82-6-4BK	6	1/4	-4	6.3	M12x1.5	44	25	16	14
36C82-10-6BK	10	3/8	-6	9.5	M16x1.5	48	26	16	19
36C82-15-8BK	12	1/2	-8	12.7	M22x1.5	54	28	18	27

7C 60° Cone Swivel Female 90° Elbow

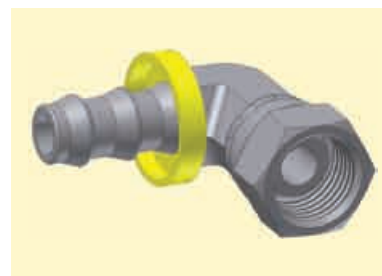


XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	A mm	B mm	E mm	W mm
	DN	Inch	Size	mm					
37C82-6-4BK	6	1/4	-4	6.3	M12x1.5	30	11	22	14
37C82-10-6BK	10	3/8	-6	9.5	M16x1.5	34	11	25	19
37C82-15-8BK	12	1/2	-8	12.7	M22x1.5	43	16	32	27

Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:

B: Brass; **K:** Without plastic ring; **SM:** Metric Hexagon

82 801 804 821FR 830M 831 836 837BM 837PU 838M



Assembly Instructions

1. Cut the hose right angled with a sharp knife. If necessary it is possible to use a lubricant (water/soap solution with 5 % soap fluid and 95 % water) for easy assembly.
2. Insert fitting into hose until first barb is in hose. Place end of fitting against a flat object (bench, door, wall) and grip hose approximately 1" from end and push with a steady force until end of hose is covered by yellow plastic collar. Alternatively please use the Parker Assembly Tool No. 611050G or 611050HV.

Attention!

During assembly, please keep in mind that Push-Lok fittings will provide an effective grip only when the Push-Lok hose is pushed fully on the insert, where the cropped end of the hose should be fully concealed by the plastic collar. **For easy assembly of hose 830M, 837BM and 837PU please use only Push-Lok Assembly Oil No. H896137.** Push-Lok Assembly Oil is free from wetting disturbing substances.

Don't use oil, lubricant or soap fluids for this hose!



Disassembly Instructions

1. Cut lengthwise along a line at approximately a 20 angle from centre line of hose. The cut should be approximately 1" long. Be careful not to nick barbs when cutting the hose.
2. Grip hose and give a sharp down-ward tug to disengage from fitting.


Attention!

Before re-use of the nipple please check nipple for damage. Damaged nipples can cause leakage.


Assembly Tool

Tool designed for assembly of Push-Lok fittings and hose in all sizes. Toggle actions greatly reduce effort necessary to hold hose and press in fitting. Only a few pounds of force is needed on either handle to quickly assemble any size.

Light version
Part No. 611050G

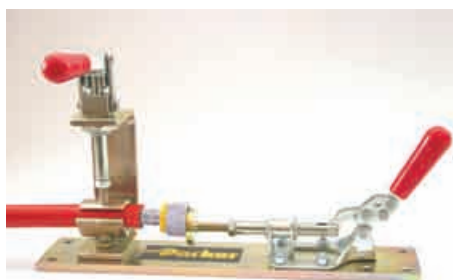

Heavy version
Part No. 611050HV

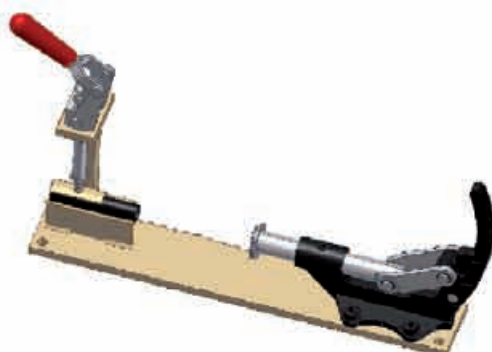

Push-Lok Assembly Oil
1-litre bottle Part No. H896137



Low-Pressure Transportation and Hydraulic Hose and Fittings

– the right solution for special applications and requirements



- A wide range of different hose types in rubber is available, with textile-braided or fire-retardant covers
- Proven, safe and easy self-assembly system
- Large bore sizes available
- High working temperatures
- One fitting series for all SAE 100 R5 and similar hoses



Parkrimp® *No-Skive*

The system for fast and leak-free assemblies


- No skiving tool needed
- No need to remove the cover
- Crimps one piece fittings
- Parkalign positions the fittings in the dies perfectly every time
- Quick and easy: no gauges to set on the machine
- Portable machines for field repair
- Meets EN safety regulations

The perfect match




The complete system from one source. No-Skive hose, No-Skive fitting and crimping machine with world-wide guarantee and availability.

Parker's colour-coded die sets

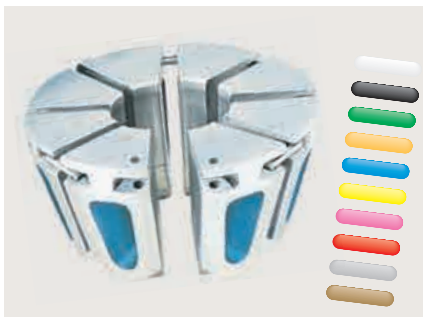

No loose parts to mismatch or misplace – die set segments linked together. Die sets provide 360° evenly applied crimping forces for an ideal crimp result.

Parkalign®



Parker's exclusive Parkalign® positions the fitting in the dies perfectly every time.



Applications

The definitive hose range for all special applications and requirements



Transportation and Hydraulic Hoses and Fittings

Low-pressure	Transport + Hydraulic	Standard	601	<i>No-Skive</i> Hose	B2a-1
			611	<i>No-Skive</i> Hose	B2a-2
			681	<i>No-Skive</i> Hose	B2a-3
		High temperature	611HT	<i>No-Skive</i> Hose	B2a-4
		Railway	681DB	<i>No-Skive</i> Hose	B2a-5
		Transportation	201	<i>No-Skive</i> Hose	B2a-6
			206	<i>No-Skive</i> Hose	B2a-7
			213	<i>No-Skive</i> Hose	B2a-8
			293	<i>No-Skive</i> Hose	B2a-9
		Fire retardant	221FR	<i>No-Skive</i> Hose	B2a-10
		Refrigeration	285	<i>No-Skive</i> Hose	B2a-11
	Fittings	Serie 26	DIN		B2b-1 – B2b-2
			BSP		B2b-3 – B2b-4
			SAE		B2b-5 – B2b-7
			ORFS		B2b-8
			Others		B2b-9 – B2b-11

601 – No-Skive

SAE 100 R3

Primary Applications

General Market: Medium pressure hydraulic applications

Applicable Specifications

SAE 100 R3, EN 854-R3

Construction

Tube: Synthetic rubber
Reinforcement: Two layers of textile braid
Cover: MSHA accepted synthetic rubber

Temperature Range -40 °C up to +125 °C

Exception: Air max. +70 °C
Water max. +85 °C

- Textile braided reinforcement
- *No-Skive* hose construction
- Small bend radii
- Up to +125 °C working temperature







Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

- Available as complete hose assembly
- Parker 43 series fittings are compatible with this hose and are available only upon request.

Part Number						Pressure Rating					
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure		min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
601-4	6	1/4	-4	6,3	14,0	8,6	1250	35,0	5000	75	0,19
601-6	10	3/8	-6	9,5	19,0	7,8	1125	31,0	4500	100	0,33
601-8	12	1/2	-8	12,7	23,0	6,9	1000	28,0	4000	130	0,42
601-12	20	3/4	-12	19,1	32,0	5,2	750	21,0	3000	150	0,64
601-16	25	1	-16	25,4	38,0	3,9	565	16,0	2250	200	0,91

The combination of high temperature and high pressure could reduce the hose life.

611 – No-Skive

EN 854 – R6

Primary Applications

General Market: Low pressure hydraulic applications

Applicable Specifications

EN 854 – R6

Construction

Tube: Synthetic rubber
Reinforcement: Two layers of textile braid
Cover: Synthetic rubber

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C

Water max. +85 °C



- Two layers of textile braid
- According to EN 854 – R6
- *No-Skive* hose construction for 2 piece fittings





Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

- Available as complete hose assembly
- Compatible with 2 piece fittings for use with adjustable crimpers only (47 series nipple and 10064 series shell)

Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				 min. bend radius	 weight
	max. dynamic working pressure		min. burst pressure								
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
611-4	6	1/4	-4	6.3	12.8	2.8	400	11.2	1600	65	0.13
611-6	10	3/8	-6	9.5	16.0	2.8	400	11.2	1600	75	0.16
611-8	12	1/2	-8	12.7	20.0	2.8	400	11.2	1600	100	0.27
611-10	16	5/8	-10	15.9	23.2	2.4	350	9.6	1400	125	0.28
611-12	20	3/4	-12	19.0	26.2	2.1	300	8.4	1200	150	0.36

The combination of high temperature and high pressure could reduce the hose life.

681 – No-Skive 2TE

EN 854-2TE



- Two layers of fabric braid
- *No-Skive* hose construction
- Small bend radii

Primary Applications

General Market: Medium pressure hydraulic application

Applicable Specifications

EN 854-2TE

Construction

Tube: Synthetic rubber
Reinforcement: Two layers of textile braid
Cover: Synthetic rubber

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C
Water max. +85 °C







Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

- Available as complete hose assembly
- Compatible with 2 piece fittings for use with adjustable crimpers only (47 series nipple and 10064 series shell)

Part Number						Pressure Rating					
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure		min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
681-4	6	1/4	-4	6.3	13.1	7.5	1090	30.0	4360	40	0.15
681-5	8	5/16	-5	7.9	14.6	6.8	980	27.0	3920	50	0.16
681-6	10	3/8	-6	9.5	16.2	6.3	910	25.0	3640	60	0.19
681-8	12	1/2	-8	12.7	19.9	5.8	840	23.0	3360	70	0.24
681-10	16	5/8	-10	15.9	23.4	5.0	725	20.0	2900	90	0.35
681-12	20	3/4	-12	19.1	26.5	4.5	650	18.0	2600	110	0.39
681-16	25	1	-16	25.4	33.4	4.0	580	16.0	2320	150	0.59

The combination of high temperature and high pressure could reduce the hose life.

611HT – No-Skive

High Temperature Textile-Hose

Primary Applications

General Market: Low pressure hydraulic applications/
high temperature applications

Engine Applications:

Diesel fuel lines, engine cooling circuits

Applicable Specifications

EN 854 - R6

Construction

Tube: Synthetic PKR rubber

Reinforcement: One textile braid

Cover: MSHA accepted synthetic rubber

Temperature Range -40 °C up to +150 °C

Exception: Air max. +100 °C

Water max. +85 °C

- For high demanding applications, such as diesel fuel lines, water cooling or high-temp lines up to +150 °C
- MSHA - accepted synthetic rubber cover
- According to EN 854 – R6
- *No-Skive* hose construction for 2 piece fittings







Recommended Fluids

Petroleum-based hydraulic fluids and lubrication oils, diesel fuels and antifreeze solutions; water-glycol and water-oil emulsion, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

- Available as complete hose assembly
- Compatible with 2 piece fittings for use with adjustable crimpers only (47 series nipple and 10064 series shell)

Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				 min. bend radius	 weight
						 max. dynamic working pressure		 min. burst pressure			
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
611HT-4	6	1/4	-4	6.3	12.8	2.8	400	11.2	1600	65	0.13
611HT-6	10	3/8	-6	9.5	16.0	2.8	400	11.2	1600	75	0.16
611HT-8	12	1/2	-8	12.7	20.0	2.8	400	11.2	1600	100	0.27
611HT-10	16	5/8	-10	15.9	23.2	2.4	350	9.6	1400	125	0.28
611HT-12	20	3/4	-12	19.0	26.2	2.1	300	8.4	1200	150	0.36

The combination of high temperature and high pressure could reduce the hose life.

681DB – No-Skive 2TE

EN 854-2TE

(with approvals for rail transportation)

Primary Applications

General Market: Medium pressure hydraulic application

Rail Transportation Market:

Hydraulic applications around
train vehicles

Applicable Specifications

EN 854-2TE

Construction

Tube: Synthetic rubber

Reinforcement: Two layers of textile braid

Cover: Flame retardent synthetic rubber

Temperature Range -40 °C up to +100 °C

Exception: Air max. +70 °C

Water max. +85 °C



- Two layers of fabric braid
- **No-Skive** hose construction
- Small bend radii
- Flame retardent rubber cover
- Railway approved as follow:
 - German Standard: **DIN 5510-2**
 - French Standard: **NF F16-101/102 I2/F3**
 - British Standard: **BS 6853 - Table 4**







Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series

- Available as complete hose assembly
- Compatible with 2 piece fittings for use with adjustable crimpers only (47 series nipple and 10064 series shell)

Part Number						Pressure Rating					
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure		min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
681DB-4	6	1/4	-4	6.3	13.1	7.5	1090	30.0	4360	40	0.15
681DB-5	8	5/16	-5	7.9	14.6	6.8	980	27.0	3920	50	0.16
681DB-6	10	3/8	-6	9.5	16.2	6.3	910	25.0	3640	60	0.19
681DB-8	12	1/2	-8	12.7	19.9	5.8	840	23.0	3360	70	0.24
681DB-10	16	5/8	-10	15.9	23.4	5.0	725	20.0	2900	90	0.35
681DB-12	20	3/4	-12	19.1	26.5	4.5	650	18.0	2600	110	0.39
681DB-16	25	1	-16	25.4	33.4	4.0	580	16.0	2320	150	0.59

The combination of high temperature and high pressure could reduce the hose life.

201 – No-Skive Airbrake

SAE 100 R5 – SAE J1402 All

Primary Applications

Transportation: Air brake hose

General: Medium pressure applications

Applicable Specifications

SAE 100 R5 , SAE J1402 All, D. O. T. FMVSS 106-All

Construction

Tube: Synthetic rubber

Reinforcement: Textile inner braid,
high tensile steel wire braid

Cover: Rubber layer and textile braided cover

Temperature Range -40 °C up to +150 °C

Exception: Air max. +70 °C

Water max. +85 °C

- Textile braided cover
- *No-Skive* hose construction
- 150 °C working temperature







Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating				Vaccum kilo Pascal *1 kPa		
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure			min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi		mm	kg
201-4		3/16	-4	5.0	12.2	20.7	3000	83	12000	95	75	0.22
201-5		1/4	-5	6.3	14.8	20.7	3000	83	12000	95	85	0.27
201-6		5/16	-6	8.0	17.2	15.5	2250	62	9000	95	100	0.34
201-8		13/32	-8	10.0	19.5	13.8	2000	55	8000	95	120	0.40
201-10		1/2	-10	12.5	23.4	12.0	1750	48	7000	95	140	0.55
201-12		5/8	-12	16.0	27.4	10.3	1500	41	6000	95	165	0.68
201-16		7/8	-16	22.0	31.4	5.5	800	22	3200	67	185	0.68
201-20		1-1/8	-20	29.0	38.1	4.3	625	17	2500	67	230	0.76
201-24		1-3/8	-24	35.0	44.5	3.5	500	14	2000	51	265	1.01
201-32		1-13/16	-32	46.0	56.4	2.4	350	10	1400	37	335	1.32

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101kPa.

The combination of high temperature and high pressure could reduce the hose life.

The maximum working pressures shown in the table are for service up to a maximum temperature of 100 °C.

For use of higher temperatures, consult the pressure/temperature curve in section A for the reduced maximum working pressure.

206 – *No-Skive* Airbrake

SAE 100 R5 – SAE J1402 All

Primary Applications

Transportation: Air brake hose

General: Medium pressure applications

Applicable Specifications

SAE 100 R5 , SAE J1402 All, D. O. T. FMVSS 106-All

Construction

Tube: Parker PKR-elastomer tube

Reinforcement: Textile inner braid,
high tensile steel wire braid

Cover: Rubber layer and
blue textile braided cover

- Blue textile braided cover
- *No-Skive* hose construction
- For very low (-48 °C) working temperature

Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.







Temperature Range -48 °C up to +150 °C

Exception: Air max. +100 °C

Water max. +85 °C

Fittings Series



Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				 min. bend radius	 weight	
	DN	Inch	Size	mm	mm	 max. dynamic working pressure		 min. burst pressure				Vaccum kilo Pascal *1 kPa
						MPa	psi	MPa	psi			
206-4		3/16	-4	5.0	13.2	20.7	3000	83	12000	95	75	0.22
206-5		1/4	-5	6.3	14.8	20.7	3000	83	12000	95	85	0.27
206-6		5/16	-6	8.0	17.1	15.5	2250	62	9000	95	90	0.34
206-8		13/32	-8	10.0	19.5	13.8	2000	55	8000	95	90	0.40
206-10		1/2	-10	12.5	23.4	12.0	1750	48	7000	95	100	0.55
206-12		5/8	-12	16.0	27.4	10.3	1500	41	6000	95	100	0.68
206-16		7/8	-16	22.0	31.4	5.5	800	22	3200	67	100	0.68
206-20		1-1/8	-20	29.0	38.1	4.3	625	17	2500	67	140	0.76
206-24		1-3/8	-24	35.0	44.5	3.5	500	14	2000	51	190	1.01
206-32		1-13/16	-32	46.0	56.4	2.4	350	10	1400	37	335	1.32

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101kPa.

The combination of high temperature and high pressure could reduce the hose life.

The maximum working pressures shown in the table are for service up to a maximum temperature of 100 °C.

For use of higher temperatures, consult the pressure/temperature curve in section A for the reduced maximum working pressure.

213 – *No-Skive* High Temperature

For engines and pressed air systems

Primary Applications

Transportation: Air brake hose

Compressors: Compressed air hose

Applicable Specifications

SAE J1402 AI, D.O.T. FMVSS 106-AI

Construction

Tube: Parker PKR-elastomer tube

Reinforcement: Textile inner braid,
high tensile steel wire braid

Cover: Rubber layer and
black textile braided cover
include 2 green strips

- *No-Skive* hose construction
- Ideal for high-temperature and small bend radii applications
- Compatible with a large range of fluids

Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude and fuel oils, air and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.







Temperature Range -45 °C up to +150 °C

Exception: Air max. +100 °C

Water max. +85 °C

Fittings Series



Part Number						Pressure Rating					
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure		min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
213-4		3/16	-4	5.0	12.5	13.8	2000	55.0	8000	20	0.18
213-5		1/4	-5	6.3	14.1	10.3	1500	41.0	6000	25	0.21
213-6		5/16	-6	8.0	15.7	10.3	1500	41.0	6000	30	0.25
213-8		13/32	-8	10.0	18.7	8.6	1250	34.0	5000	45	0.30
213-10		1/2	-10	12.5	21.1	6.9	1000	28.0	4000	55	0.33
213-12		5/8	-12	16.0	24.3	5.2	750	21.0	3000	70	0.36
213-16		7/8	-16	22.0	30.6	2.8	400	11.0	1600	90	0.45
213-20		1-1/8	-20	29.0	37.8	2.1	300	8.0	1200	115	0.65
213-24		1-3/8	-24	35.0	44.0	1.7	300	8.0	1200	190	0.73
213-32		1-13/16	-32	46.0	54.5	1.4	200	5.5	800	355	1.00

The combination of high temperature and high pressure could reduce the hose life.

The maximum working pressures shown in the table are for service up to a maximum temperature of 100 °C.

For use of higher temperatures, consult the pressure/temperature curve in section A for the reduced maximum working pressure.

293 – *No-Skive* High Temperature

Engine and air brake/truck hose

Primary Applications

Truck Market: Air brake hose
Engine cooling circuit

Applicable Specifications

SAE J1402 AI, D.O.T. FMVSS 106

Construction

Tube: Synthetic PKR rubber
Reinforcement: One textile braid
Cover: Black nylon braid

Temperature Range -50 °C up to +150 °C

Exception: Air max. +100 °C
Water max. +85 °C







- High temperature
– high flex hose performance
- *No-Skive* hose construction
- Wide temperature range

Recommended Fluids

Petroleum-based hydraulic fluids and lubrication oils, diesel fuels and antifreeze solutions; water-, water-oil- and water-glycol emulsion hydraulic fluids. Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating					
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure		min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
293-4		3/16	-4	5.0	12.5	3.5	500	13.8	2000	15	0.15
293-6		5/16	-6	8.0	15.7	3.5	500	13.8	2000	25	0.22
293-8		13/16	-8	10.0	18.7	3.5	500	13.8	2000	40	0.27
293-10		1/2	-10	12.5	21.1	3.1	450	12.4	1800	50	0.30
293-12		5/8	-12	16.0	24.3	3.1	450	12.4	1800	65	0.33
293-16		7/8	-16	22.0	30.6	3.1	450	12.4	1800	80	0.37

The combination of high temperature and high pressure could reduce the hose life.

221FR – *No-Skive* Fire Retardant

Marine fuel and engine hose

Primary Applications

Marine: Marine fuel hose
General: Where fire retardance is an issue

Applicable Specifications

SAE J1527 R3, USCG Type AI, SAE J1942, ISO 7840

Construction

Tube: Fuel and oil-resistant rubber
Reinforcement: High tensile steel wire braid
Cover: Flame retardant special fiber outer cover

Temperature Range -20 °C up to +100 °C

Exception: Air max. +70 °C
Water max. +85 °C









Recommended Fluids

Petroleum based hydraulic fluids, water-glycol and water-oil emulsion hydraulic fluids, grease, lubricants, crude, fuel oils and water.

Consult the chemical compatibility section on pages **Ab-21** to **Ab-29** for more detailed information.

Fittings Series



Part Number						Pressure Rating				Vaccum kilo Pascal *1 kPa		
	Hose I.D.				Hose O.D.	 max. dynamic working pressure		 min. burst pressure			min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi		mm	kg
221FR-5		1/4	-5	6.3	15	3.5	500	14.0	2000	81	25	0.28
221FR-6		5/16	-6	8.0	17	3.5	500	14.0	2000	81	30	0.34
221FR-8		13/32	-8	10.0	20	3.5	500	14.0	2000	81	45	0.42
221FR-10		1/2	-10	12.5	23	3.5	500	14.0	2000	68	55	0.58
221FR-12		5/8	-12	16.0	27	3.5	500	14.0	2000	68	70	0.61
221FR-16		7/8	-16	22.0	31	3.5	500	14.0	2000	68	90	0.70

*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101kPa.
The combination of high temperature and high pressure could reduce the hose life.

285 – Air Conditioning and Refrigeration

SAE J2064 Type C, Class 1

Primary Applications

Air Conditioning: For industrial and mobile applications

Applicable Specifications

SAE J2064 Type C, Class 1

Construction

Tube: Nylon barrier between
two elastomeric layers
Reinforcement: One textile braid
Cover: Heat, moisture and
ozone resistant rubber



- **No-Skive** hose construction
- For main refrigerant fluids usable
- Compatible with modern refrigerants

Recommended Fluids

For use with Freon refrigerants 12, 134a and 22.
Consult the chemical compatibility section on
pages **Ab-21** to **Ab-29** for more detailed information.

Temperature Range -30 °C up to +125 °C

Fittings Series




Part Number	Hose I.D.				Hose O.D. mm	Pressure Rating				Vacuum kilo Pascal *1 kPa	min. bend radius mm	weight kg
	DN	Inch	Size	mm		max. dynamic working pressure MPa	psi	min. burst pressure MPa	psi			
285-4-RL		3/16	-4	5,0	12,4	3,4	500	17,2	2500	95	25	0,14
285-6-RL		5/16	-6	8,0	15,7	3,4	500	17,2	2500	95	38	0,19
285-8-RL		13/32	-8	10,0	18,8	3,4	500	17,2	2500	95	51	0,25
285-10-RL		1/2	-10	12,5	21,1	3,4	500	17,2	2500	95	64	0,27
285-12-RL		5/8	-12	16,0	24,4	3,4	500	17,2	2500	95	76	0,34





*1 = the vacuum values listed in the table are vacuum pressure values in kPa. For an absolute value subtract the table value from 101kPa.
For size -16 a hose 285-16 is available on request.
RL = only available on reels.

Page B2b-1 – B2b-2		CA B2b-1 Female Metric 24° Light Series with O-Ring Swivel – Straight ISO 12151-2-SWS-L – DKOL	CE B2b-1 Female Metric 24° Light Series with O-Ring Swivel – 45° Elbow ISO 12151-2-SWE 45°-L – DKOL 45°	CF B2b-2 Female Metric 24° Light Series with O-Ring Swivel – 90° Elbow ISO 12151-2-SWE-L – DKOL 90°
49 B2b-2 Metric Banjo Straight DIN 7642	Page B2b-3 – B2b-4 BSP		92 B2b-3 Female BSP Parallel Pipe Swivel – Straight (60° Cone) BS5200-A – DKR	B1 B2b-3 Female BSP Parallel Pipe Swivel 45° Elbow (60° Cone) BS 5200-D – DKR 45°
B2 B2b-4 Female BSP Parallel Pipe Swivel 90° Elbow (60° Cone) BS 5200-B – DKR 90°	91 B2b-4 Male BSP Taper Pipe – Rigid Straight BS5200 – AGR-K	Page B2b-5 – B2b-7 SAE		01 B2b-5 Male NPTF Pipe Rigid – Straight SAE J476A / J516 – AGN
06/68 B2b-5 Female – JIC 37° SAE 45° Dual Flare Swivel – Straight ISO12151-5-SWS – DKJ	08 B2b-6 Female SAE 45° – Swivel Straight SAE J516	37/3V B2b-6 Female JIC 37° SAE 45° – Dual Flare Swivel Female 45° Elbow ISO 12151-5-SWE 45° – DKJ 45°	39/3W B2b-7 Female JIC 37° SAE 45° – Dual Flare Swivel Female 90° Elbow ISO 12151-5-SWES – DKJ 90°	
Page B2b-8 ORFS		JC B2b-8 Female ORFS Swivel – Straight Short ISO 12151-1 – SWSA SAE J516 – ORFS	Page B2b-9 – B2b-11 Others	
5H B2b-9 Female Tube O-Ring Swivel 45° Elbow – Short Pilot	5T B2b-10 Female Tube O-Ring Swivel 90° Elbow – Short Pilot	59PT B2b-10 Male Tube O-Ring Swivel Long Pilot With Charge Port at 180° for R134a		5LPT B2b-11 Female Tube O-Ring Swivel 90° Elbow – Long Pilot With Charge Port at 180° for R134a

CA
**Female Metric 24°
Light Series with O-Ring
Swivel – Straight**

ISO 12151-2-SWS-L – DKOL









XXXXX-XX-XX Part Number 	 Hose I.D.			 Thread metric	Tube O.D.	A	B	 W
	Inch	Size	mm		mm	mm	mm	mm
1CA26-6-4	3/16	-4	5.0	M12x1.5	6	40	20	14
1CA26-8-4	3/16	-4	5.0	M14x1.5	8	41	21	17
1CA26-10-5	1/4	-5	6.3	M16x1.5	10	41	20	19
1CA26-10-6	5/16	-6	8.0	M16x1.5	10	41	20	19
1CA26-12-6	5/16	-6	8.0	M18x1.5	12	41	21	22
1CA26-12-8	13/32	-8	10.0	M18x1.5	12	41	21	22
1CA26-15-8	13/32	-8	10.0	M22x1.5	15	42	21	27
1CA26-18-10	1/2	-10	12.5	M26x1.5	18	46	23	32
1CA26-18-12	5/8	-12	16.0	M26x1.5	18	46	23	32
1CA26-22-12	5/8	-12	16.0	M30x2	22	48	25	36
1CA26-28-16	7/8	-16	22.0	M36x2	28	54	28	41
1CA26-28-20	1-1/8	-20	29.0	M36x2	28	60	34	41
1CA26-35-20	1-1/8	-20	29.0	M45x2	35	56	29	50
1CA26-35-24	1-3/8	-24	35.0	M45x2	35	62	34	50
1CA26-42-24	1-3/8	-24	35.0	M52x2	42	59	31	60

Hose fittings are delivered with ozone resistant Nitrile (NBR) O-ring as a standard version. Working temperature from -30 °C up to +105 °C.
Hose fittings with special O-rings (Viton or EPDM) available on request. For O-ring dimensions and part-numbers see Section Eb.

CE
**Female Metric 24°
Light Series with O-Ring
Swivel – 45° Elbow**

ISO 12151-2-SWE 45°-L – DKOL 45°

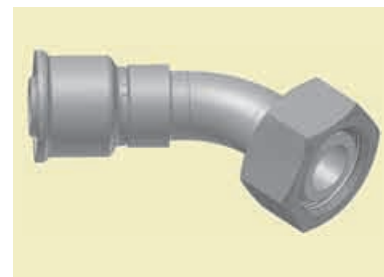

XXXXX-XX-XX Part Number 	 Hose I.D.			 Thread metric	Tube O.D.	A	B	E	 W
	Inch	Size	mm		mm	mm	mm	mm	mm
1CE26-10-6	5/16	-6	8.0	M16x1.5	10	66	45	17	19
1CE26-12-6	5/16	-6	8.0	M18x1.5	12	66	45	17	22
1CE26-12-8	13/32	-8	10.0	M18x1.5	12	59	39	17	22
1CE26-15-8	13/32	-8	10.0	M22x1.5	15	60	39	17	27
1CE26-18-10	1/2	-10	12.5	M26x1.5	18	69	46	21	32
1CE26-18-12	5/8	-12	16.0	M26x1.5	18	73	50	22	32
1CE26-22-12	5/8	-12	16.0	M30x2	22	77	55	26	36
1CE26-28-16	7/8	-16	22.0	M36x2	28	103	76	33	41

Hose fittings are delivered with ozone resistant Nitrile (NBR) O-ring as a standard version. Working temperature from -30 °C up to +105 °C.
Hose fittings with special O-rings (Viton or EPDM) available on request. For O-ring dimensions and part-numbers see Section Eb.



Approved **fitting series** for hose types:

26 201 206 213 221FR 285 293

CF

Female Metric 24° Light Series with O-Ring Swivel – 90° Elbow

ISO 12151-2-SWE-L – DKOL 90°

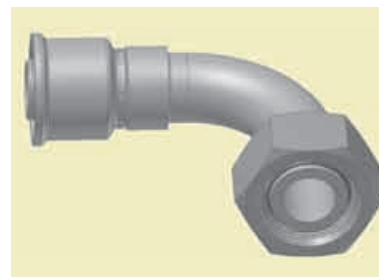



XXXXX-XX-XX Part Number 26	Hose I.D.			Thread metric	Tube O.D. mm	A mm	B mm	E mm	W mm
	Inch	Size	mm						
1CF26-8-4	3/16	-4	5.0	M14x1.5	8	48	28	29	17
1CF26-10-5	1/4	-5	6.3	M16x1.5	10	55	36	29	19
1CF26-10-6	5/16	-6	8.0	M16x1.5	10	55	34	31	19
1CF26-12-6	5/16	-6	8.0	M18x1.5	12	56	35	35	22
1CF26-12-8	13/32	-8	10.0	M18x1.5	12	51	30	31	22
1CF26-15-8	13/32	-8	10.0	M22x1.5	15	58	38	41	27
1CF26-18-10	1/2	-10	12.5	M26x1.5	18	57	34	38	32
1CF26-18-12	5/8	-12	16.0	M26x1.5	18	69	46	45	32
1CF26-22-12	5/8	-12	16.0	M30x2	22	78	55	47	36
1CF26-18-16	7/8	-16	22.0	M26x1.5	18	92	65	70	32
1CF26-28-16	7/8	-16	22.0	M36x2	28	95	68	71	41
1CF26-28-20	1-1/8	-20	29.0	M36x2	28	117	90	81	41
1CF26-35-20	1-1/8	-20	29.0	M45x2	35	117	90	77	50
1CF26-35-24	1-3/8	-24	35.0	M45x2	35	117	89	79	50

Hose fittings are delivered with ozone resistant Nitrile (NBR) O-ring as a standard version. Working temperature from -30 °C up to +105 °C.
Hose fittings with special O-rings (Viton or EPDM) available on request. For O-ring dimensions and part-numbers see Section Eb.

49

Metric Banjo Straight

DIN 7642

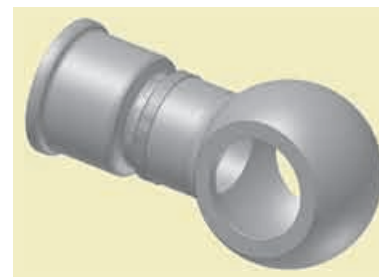


XXXXX-XX-XX Part Number 26	Hose I.D.			A mm	B mm	D mm
	Inch	Size	mm			
14926-12-6	5/16	-6	8.0	47	26	12
14926-14-6	5/16	-6	8.0	49	28	14
14926-14-8	13/32	-8	10.0	48	28	14
14926-16-8	13/32	-8	10.0	50	30	16
14926-33.4-20	1-1/8	-20	29.0	75	48	33

Approved **fitting series** for hose types:

26 201 206 213 221FR 285 293

92 Female BSP Parallel Pipe Swivel – Straight (60° Cone)



BS5200-A – DKR



XXXXX-XX-XX Part Number 26	Hose I.D.			Thread BSP	A mm	B mm	W mm
	Inch	Size	mm				
19226-4-4	3/16	-4	5.0	1/4x19	41	20	19
19226-6-6	5/16	-6	8.0	3/8x19	42	21	22
19226-6-8	13/32	-8	10.0	3/8x19	41	21	22
19226-8-8	13/32	-8	10.0	1/2x14	44	23	27
19226-8-10	1/2	-10	12.5	1/2x14	45	22	27
19226-12-12	5/8	-12	16.0	3/4x14	45	24	32
19226-16-16	7/8	-16	22.0	1x11	52	25	41
19226-20-20	1-1/8	-20	29.0	1-1/4x11	58	31	50

B1 Female BSP Parallel Pipe Swivel 45° Elbow (60° Cone)

BS 5200-D – DKR 45°

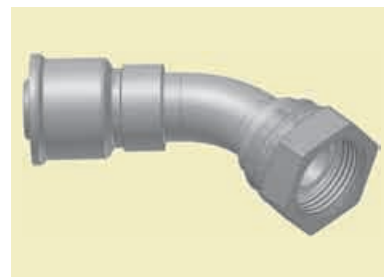



XXXXX-XX-XX Part Number 26	Hose I.D.			Thread BSP	A mm	B mm	E mm	W mm
	Inch	Size	mm					
1B126-4-4	3/16	-4	5.0	1/4x19	53	33	15	19
1B126-6-6	5/16	-6	8.0	3/8x19	56	36	16	22
1B126-8-8	13/32	-8	10.0	1/2x14	62	42	16	27
1B126-10-10	1/2	-10	12.5	5/8x14	67	44	20	30
1B126-12-12	5/8	-12	16.0	3/4x14	70	47	18	32

Approved **fitting series** for hose types:

26 201 206 213 221FR 285 293

B2 Female BSP Parallel Pipe Swivel 90° Elbow (60° Cone)


BS 5200-B – DKR 90°

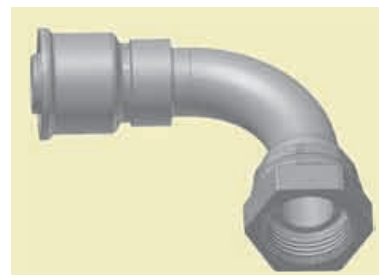

XXXXX-XX-XX Part Number 26	Hose I.D.			Thread BSP	A mm	B mm	E mm	W mm
	Inch	Size	mm					
1B226-4-4	3/16	-4	5.0	1/4x19	44	24	26	19
1B226-6-6	5/16	-6	8.0	3/8x19	47	26	29	22
1B226-8-8	13/32	-8	10.0	1/2x14	54	34	31	27
1B226-10-10	1/2	-10	12.5	5/8x14	57	34	36	30
1B226-12-12	5/8	-12	16.0	3/4x14	62	40	37	32
1B226-16-16	7/8	-16	22.0	1x11	96	69	67	41
1B226-20-20	1-1/8	-20	29.0	1-1/4x11	117	90	76	50

91 Male BSP Taper Pipe – Rigid Straight

BS5200 – AGR-K



XXXXX-XX-XX Part Number 26	Hose I.D.			Thread BSP	A mm	B mm	H mm
	Inch	Size	mm				
19126-6-6	5/16	-6	8.0	3/8x19	47	26	19
19126-8-8	13/32	-8	10.0	1/2x14	53	32	22
19126-12-12	5/8	-12	16.0	3/4x14	58	36	30
19126-16-16	7/8	-16	22.0	1x11	69	43	36


Approved **fitting series** for hose types:

26 201 206 213 221FR 285 293

01

Male NPTF Pipe Rigid – Straight

SAE J476A / J516 – AGN




XXXXX-XX-XX Part Number 26	Hose I.D.			Thread NPTF	A	B	H
	Inch	Size	mm		mm	mm	Inch
10126-4-4	3/16	-4	5.0	1/4x18	48	26	9/16
10126-4-5	1/4	-5	6.3	1/4x18	48	26	9/16
10126-4-6	5/16	-6	8.0	1/4x18	48	26	3/4
10126-6-6	5/16	-6	8.0	3/8x18	48	26	11/16
10126-6-8	13/32	-8	10.0	3/8x18	48	26	11/16
10126-8-8	13/32	-8	10.0	1/2x14	54	33	7/8
10126-8-10	1/2	-10	12.5	1/2x14	57	33	7/8
10126-12-12	5/8	-12	16.0	3/4x14	59	35	1-1/16

06/68

Female – JIC 37° SAE 45° Dual Flare Swivel – Straight

ISO12151-5-SWS – DKJ



XXXXX-XX-XX Part Number 26	Hose I.D.			Thread UNF	Tube size	A	B	W
	Inch	Size	mm		Inch	mm	mm	mm Inch
16826-4-4-SM	3/16	-4	5.0	7/16x20	1/4	43	24	14
16826-5-5-SM	1/4	-5	6.3	1/2x20	5/16	44	23	17
16826-5-5BA	1/4	-5	6.3	1/2x20	5/16	45	23	5/8
10626-6-6-SM	5/16	-6	8.0	9/16x18	3/8	45	24	19
10626-6-6	5/16	-6	8.0	9/16x18	3/8	45	23	11/16
16826-8-8-SM	13/32	-8	10.0	3/4x16	1/2	48	27	22
16826-8-10	1/2	-10	12.5	3/4x16	1/2	60	36	7/8
16826-10-10-SM	1/2	-10	12.5	7/8x14	5/8	41	19	27
16826-10-10BA	1/2	-10	12.5	7/8x14	5/8	55	31	1
16826-10-12-SM	5/8	-12	16.0	7/8x14	5/8	61	33	27
16826-10-12	5/8	-12	16.0	7/8x14	5/8	61	37	1
10626-12-12-SM	5/8	-12	16.0	1-1/16x12	3/4	56	34	32
10626-16-16-SM	7/8	-16	22.0	1-5/16x12	1	62	35	41
10626-20-20-SM	1-1/8	-20	29.0	1-5/8x12	1-1/4	66	39	50
10626-24-24-SM	1-3/8	-24	35.0	1-7/8x12	1-1/2	71	44	60
10626-32-32	1-13/16	-32	46.0	2-1/2x12	2	84	52	2-7/8


Approved **fitting series** for hose types:

BA: Nipple: Brass, Nut and Shell: Steel; SM: Metric Hexagon

26 201 206 213 221FR 285 293

08 Female SAE 45° – Swivel Straight



SAE J516



XXXXX-XX-XX Part Number 26	Hose I.D.			Thread UNF	Tube size Inch	A mm	B mm	W Inch
	Inch	Size	mm					
10826-6-6	5/16	-6	8.0	5/8x18	3/8	47	25	3/4
10826-6-6BA	5/16	-6	8.0	5/8x18	3/8	47	25	3/4
10826-12-12	5/8	-12	16.0	1-1/16x14	3/4	56	32	1-1/4

37/3V Female JIC 37° SAE 45° – Dual Flare Swivel Female 45° Elbow

ISO 12151-5-SWE 45° – DKJ 45°

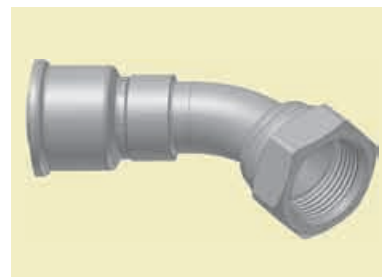

XXXXX-XX-XX Part Number 26	Hose I.D.			Thread UNF	Tube size Inch	A mm	B mm	E mm	W mm Inch
	Inch	Size	mm						
13V26-4-4-SM	3/16	-4	5.0	7/16x20	1/4	50	24	10	14
13726-6-6-SM	5/16	-6	8.0	9/16x18	3/8	54	33	11	19
13V26-8-8-SM	13/32	-8	10.0	3/4x16	1/2	59	38	15	22
13V26-10-10	1/2	-10	12.5	7/8x14	5/8	69	44	17	1
13726-12-12-SM	5/8	-12	16.0	1-1/16x12	3/4	75	53	20	32
13726-16-16-SM	7/8	-16	22.0	1-5/16x12	1	102	76	24	41



Approved **fitting series** for hose types:

BA: Nipple: Brass, Nut and Shell: Steel; SM: Metric Hexagon

26 201 206 213 221FR 285 293

39/3W Female JIC 37° SAE 45° – Dual Flare Swivel Female 90° Elbow

ISO 12151-5-SWES – DKJ 90°

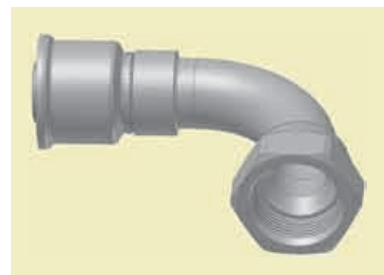

XXXXX-XX-XX Part Number 26	Hose I.D.			Thread UNF	Tube size	A	B	E	W
	Inch	Size	mm		Inch	mm	mm	mm	mm
13W26-4-4-SM	3/16	-4	5.0	7/16x20	1/4	45	20	21	14
13W26-5-5-SM	1/4	-5	6.3	1/2x20	5/16	50	30	20	17
13926-6-6-SM	5/16	-6	8.0	9/16x18	3/8	49	29	22	19
13W26-8-6-SM	5/16	-6	8.0	3/4x16	3/8	53	32	29	22
13W26-8-8-SM	13/32	-8	10.0	3/4x16	1/2	53	32	29	22
13W26-8-10-SM	1/2	-10	12.5	3/4x16	5/8	56	34	29	22
13W26-10-10-SM	1/2	-10	12.5	7/8x14	5/8	60	38	32	27
13W26-10-12-SM	5/8	-12	16.0	7/8x14	5/8	63	41	33	27
13926-12-12-SM	5/8	-12	16.0	1-1/16x12	3/4	73	51	46	32
13926-16-16-SM	7/8	-16	22.0	1-5/16x12	1	102	75	59	41
13926-20-20-SM	1-1/8	-20	29.0	1-5/8x12	1-1/4	109	81	70	50

Approved **fitting series** for hose types:


SM: Metric Hexagon






26 201 206 213 221FR 285 293

JC

**Female ORFS
Swivel – Straight
Short**


ISO 12151-1 – SWSA
SAE J516 – ORFS





XXXXX-XX-XX Part Number 	 Hose I.D.			 Thread UNF	A mm	B mm	C mm	 H mm	 W mm
	Inch	Size	mm						
1JC26-4-4-SM	3/16	-4	5.0	9/16x18	42	20	8	14	17
1JC26-6-6-SM	5/16	-6	8.0	11/16x16	36	15	-	-	22
1JC26-8-6-SM	5/16	-6	8.0	13/16x16	44	23		19	24
1JC26-8-8-SM	13/32	-8	10.0	13/16x16	37	17	11	-	24
1JC26-10-10-SM	1/2	-10	12.5	1x14	49	27	12	24	30
1JC26-12-12-SM	5/8	-12	16.0	1-3/16x12	43	21	14	-	36
1JC26-16-16-SM	7/8	-16	22.0	1-7/16x12	61	34	14	36	41
1JC26-20-20-SM	1-1/8	-20	29.0	1-11/16x12	62	35	15	50	50




Approved **fitting series** for hose types:

SM: Metric Hexagon



 26	201	206	213	221FR	285	293
--	-----	-----	-----	-------	-----	-----




5S Female Tube O-ring Swivel Short Pilot

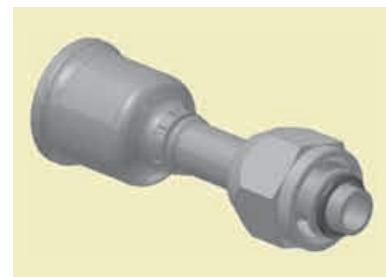

XXXXX-XX-XX Part Number 26	 Inch Size mm			 Thread UNF	A mm	B mm	D mm	 W Inch
15S26-6-6	5/16	-6	8.0	5/8x18	66	44	4.7	3/4
15S26-8-8	13/32	-8	10.0	3/4x16	67	45	4.7	7/8
15S26-10-10	1/2	-10	12.5	7/8x14	71	47	4.7	1-1/16

5H Female Tube O-Ring Swivel 45° Elbow – Short Pilot

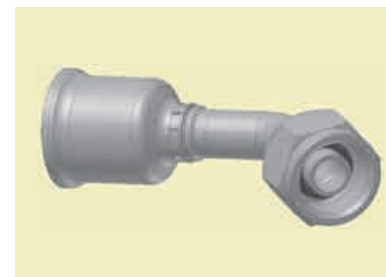



XXXXX-XX-XX Part Number 26	 Inch Size mm			 Thread UNF	A mm	B mm	D mm	E mm	 W Inch
15H26-6-6	5/16	-6	8.0	5/8x18	61	39	4.7	14	3/4
15H26-10-10	1/2	-10	12.5	7/8x14	77	53	4.7	17	1-1/16




Approved **fitting series** for hose types:



285

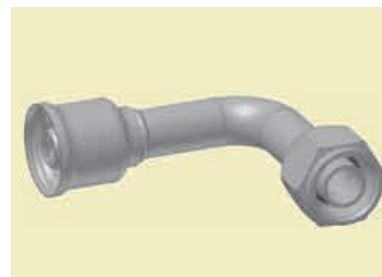
5T Female Tube O-Ring Swivel 90° Elbow – Short Pilot






XXXXX-XX-XX Part Number 26					A	B	D	E	
	Inch	Size	mm						W Inch
15T26-6-6	5/16	-6	8.0	5/8x18	56	34	4.7	36	3/4
15T26-8-8	13/32	-8	10.0	3/4x16	63	41	4.7	37	7/8
15T26-10-10	1/2	-10	12.5	7/8x14	73	49	4.7	44	1-1/16

59PT Male Tube O-Ring Swivel Long Pilot

With Charge Port at 180° for R134a





XXXXX-XX-XX Part Number 26					A	B	D	G	
	Inch	Size	mm						W Inch
15926-6-6-PT	5/16	-6	8.0	5/8x18	83	61	7.1	13	3/4
15926-8-8-PT	13/32	-8	10.0	3/4x16	74	52	9.8	13	7/8
15926-10-12-PT	5/8	-12	16.0	7/8x14	88	65	9.8	15	1-1/16




Approved **fitting series** for hose types:

26 285

5LPT Female Tube O-Ring Swivel 90° Elbow – Long Pilot

With Charge Port at 180° for R134a

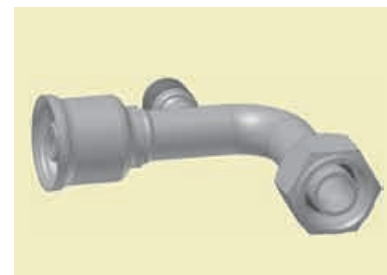

XXXXX-XX-XX Part Number 26				 Thread UNF	A	B	D	E	G	 W
	Inch	Size	mm		mm	mm	mm	mm	mm	Inch
15L26-8-8-PT	13/32	-8	10.0	3/4x16	82	60	9.8	37	15	7/8
15L26-10-10-PT	1/2	-10	12.5	7/8x14	91	67	9.8	57	15	1-1/16
15L26-10-12-PT	5/8	-12	16.0	7/8x14	91	67	9.8	57	15	1-1/16

Approved **fitting series** for hose types:



285

